

## K-Band Waveguide Termination Load, 2 Watts

### Description:

**Model SWL-4233-S1** is a low power, K-Band termination load that covers the frequency range of 18 to 26.5 GHz. The termination load exhibits a typical return loss of 30 dB. It is designed and manufactured to offer a good match for system applications. Custom levels of power handling are available under different model numbers.



### Features:

- Full Waveguide Band Coverage
- High Return Loss
- Instrumentation Grade

### Applications:

- Test Lab
- Instrumentations
- Sub-assemblies

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	18.0 GHz		26.5 GHz
Return Loss		30 dB	
Power Handling		2 W (CW)	3 W (CW)
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C


### Mechanical Specifications:

Item	Specification
Waveguide	WR-42 Waveguide
Flange	UG-595/U Flange
Waveguide Material	Brass
Finish	Gold Plated
Weight	1.2 Oz
Size	2.80" (L) x 0.54" (Ø)
Outline	WL-KL



## K-Band Waveguide Termination Load, 2 Watts

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches)

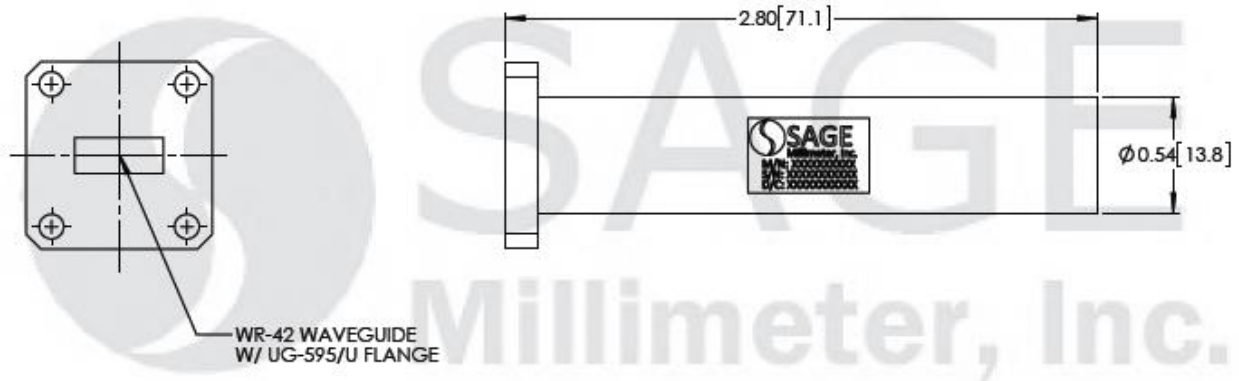

**Note:**

- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

**Caution:**

- Exceeding absolute maximum ratings shown will damage the device.
- Any foreign objects in the waveguide will cause performance degradation and possible device damage.

