

SWS-08-T1

WR-08 Waveguide Short, Tunable

SWS-08-T1 is a tunable waveguide short that covers the frequency range of 90 to 140 GHz. The tunable short is constructed with a linear bearing and high precision, Mitutoyo micrometer to guarantee smooth, long term repeatable mechanical movements. The tunable short is an ideal instrument for applications where phase variation is required. The tunable short offers a 20:1 typical VSWR.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	90 GHz		140 GHz
VSWR		20:1	
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

Mechanical Specifications:

Item	Specification
Waveguide Port	WR-08 Waveguide with UG-387/U-M Flange
Waveguide Tube	Copper
Waveguide Flange Material	Brass
Finish	Gold Plated Waveguide; Black Anodized Handle
Weight	3.5 Oz
Size	3.55" (L) X 1.13" (Ø)
Outline	WS-FT

ECCN

EAR99

FEATURES

- High VSWR
- Linear Bearing Configuration
- Mitutoyo Micrometer Driven


APPLICATIONS

- Test Lab
- Test Instrumentations
- System Calibration and Tuning



SWS-08-T1

Mechanical Outline: Unless otherwise specified, all dimensions are in inches [millimeters]

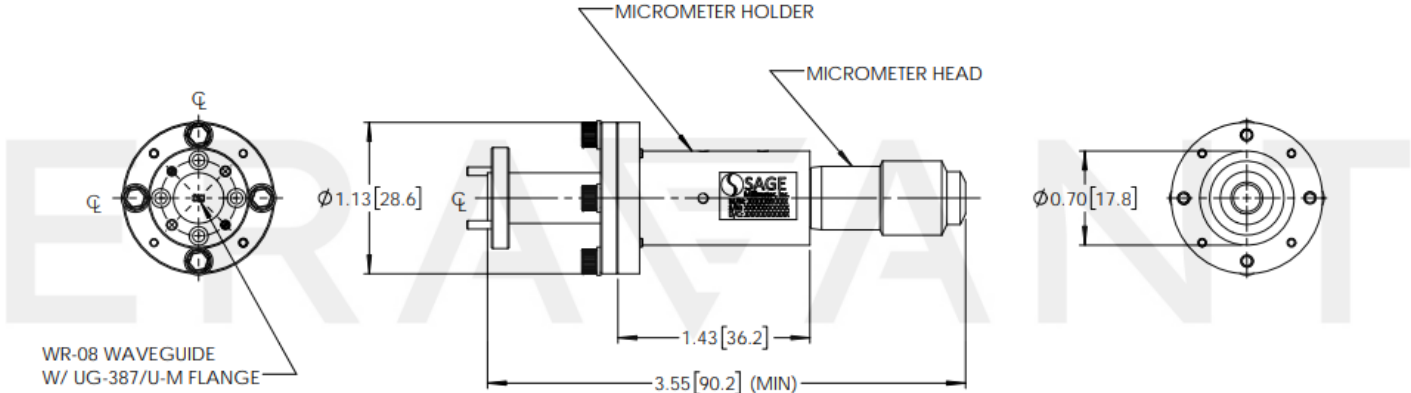

NOTE:

- Eravant reserves the right to change the information presented without notice.

CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE