

## SWX-60390340-12-4B

### Waveguide Crossguide Coupler, E Band, 40 dB

**SWX-60390340-12-4B** is a four-port, split block crossguide coupler that is offered for power sampling where directivity is of concern. Compared to a multi-hole directional coupler, crossguide couplers offer lower insertion loss and a shorter insertion length. This model operates between 60 to 90 GHz with a 40 dB typical coupling level, 0.7 dB nominal insertion loss, and 20 dB typical directivity. The input, output, and coupled ports are all WR-12 waveguides with UG-387/U anti-cocking flanges.



### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	60 GHz		90 GHz
Insertion Loss*		0.7 dB	
Coupling		40 dB	
Directivity		20 dB	
Return Loss		20 dB	
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

\*Performance may be reduced at band edges.

### Mechanical Specifications:

Item	Specification
Waveguide Ports	WR-12 Waveguide with UG-387/U Anti-Cocking Flange
Material	Aluminum
Finish	Gold Plated
Weight	0.9 Oz
Outline	WX-BE-4-F7-A

### ECCN

EAR99

### FEATURES

- Full Band Operation
- Low Insertion Loss
- Moderate Directivity
- Four Port Configuration

### APPLICATIONS


- Test Labs
- Instrumentations
- Sub-assemblies

### SUPPLEMENTAL DETAILS




## SWX-60390340-12-4B

### Typical Performance vs. Frequency

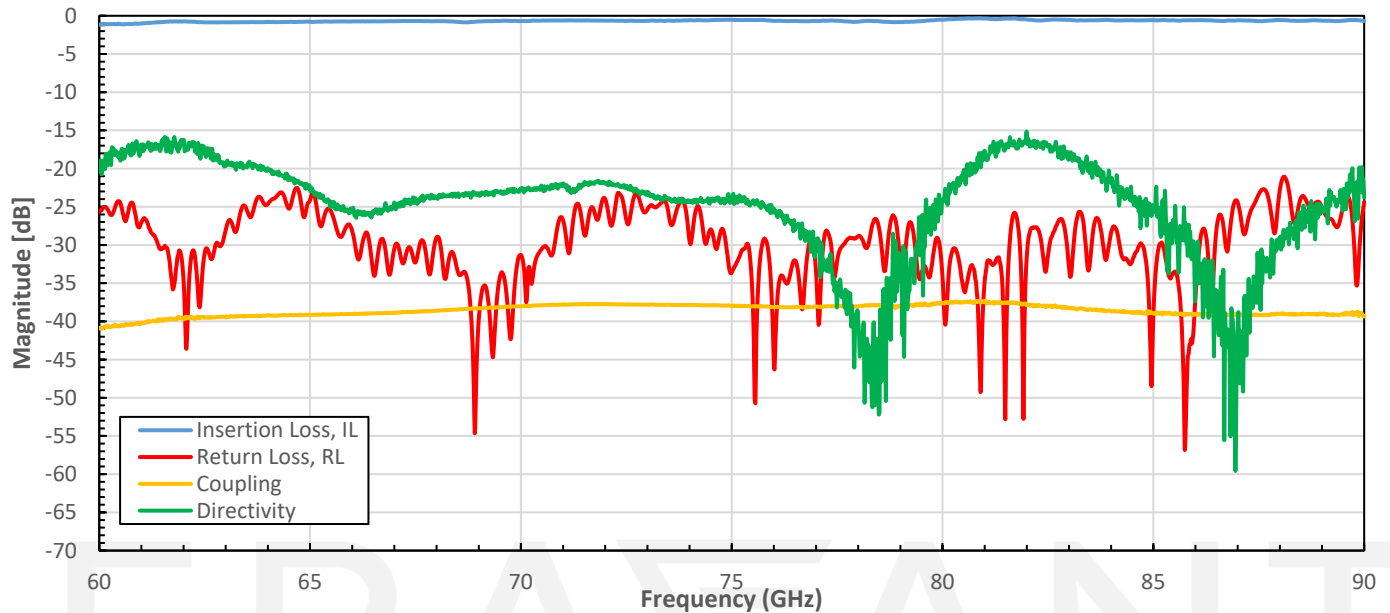

### Mechanical Outline:

Unless otherwise specified, all dimensions are in inches [millimeters]

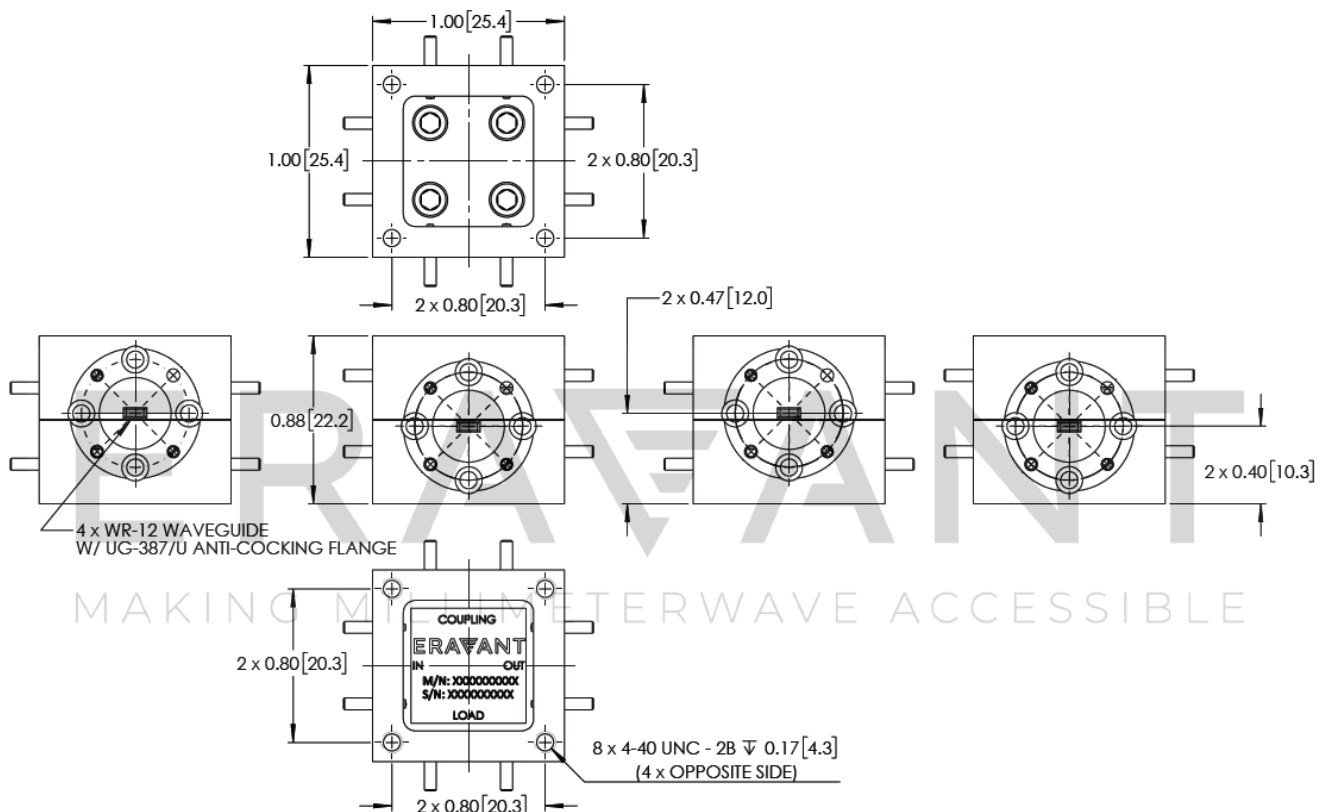

**NOTE:**

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

**CAUTION:**

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.

ERAVANT  
MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT  
MAKING MILLIMETERWAVE ACCESSIBLE