



F Band Scalar Feed Horn Antenna, 100 to 112 GHz, 17 dBi Gain

Description:

Model SAF-1041141725-082-S1 is an F-band scalar feed horn antenna that operates from 100 to 112 GHz. The antenna offers a 17 dBi nominal gain, 25 degree typical half power beamwidth, and -28.5 dB typical side lobe level. The scalar feed horn is equipped with a 0.082" diameter circular waveguide that supports both linear and circular polarization. A rectangular waveguide port configuration that only supports linear polarization is available under a different model number.



Features:

- Circular Waveguide Interface
- Precisely Machined
- Low Side Lobe Level
- High Return Loss
- Linear and Circular Polarization

Applications:

- Feed Horn for Gaussian Optical Antennas
- Feed Horn for Cassegrain Antennas
- Rapid System Setups
- Engineering Setups

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	100 GHz	106 GHz	112 GHz
Gain		17 dBi	
3 dB Beamwidth, E-plane		25°	
3 dB Beamwidth, H-plane		25°	
Side Lobes, E-plane		-28.5 dB	
Side Lobes, H-plane		-28.5 dB	
Return Loss		20 dB	
Polarization	Linear and Circular		
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

Mechanical Specifications:


Item	Specification
Antenna Port	0.082" Diameter Circular Waveguide
Flange Type	UG-387/U-M
Material	Aluminum
Finish	Gold Plated
Weight	1.5 Oz
Size	1.5" (L) X 0.6" (Ø)
Outline	AF-CF17-082






F Band Scalar Feed Horn Antenna, 100 to 112 GHz, 17 dBi Gain

Typical Antenna Patterns @ 106 GHz

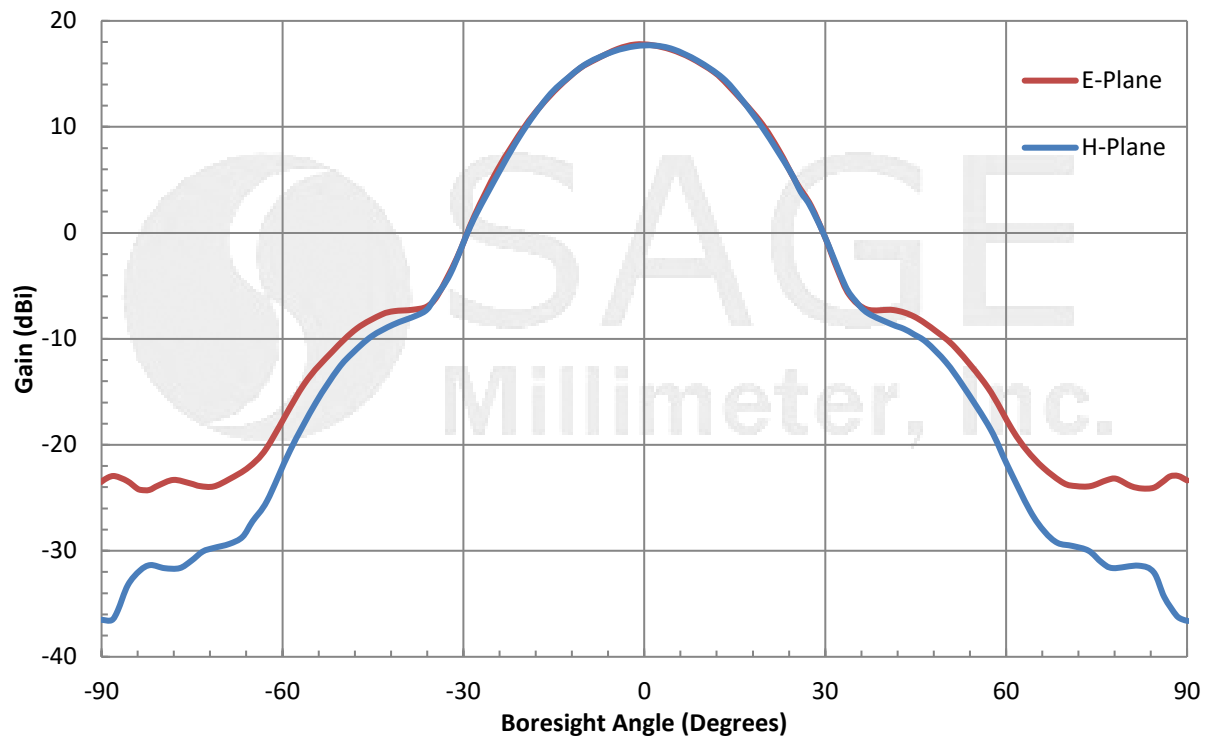


Typical Gain vs. Frequency

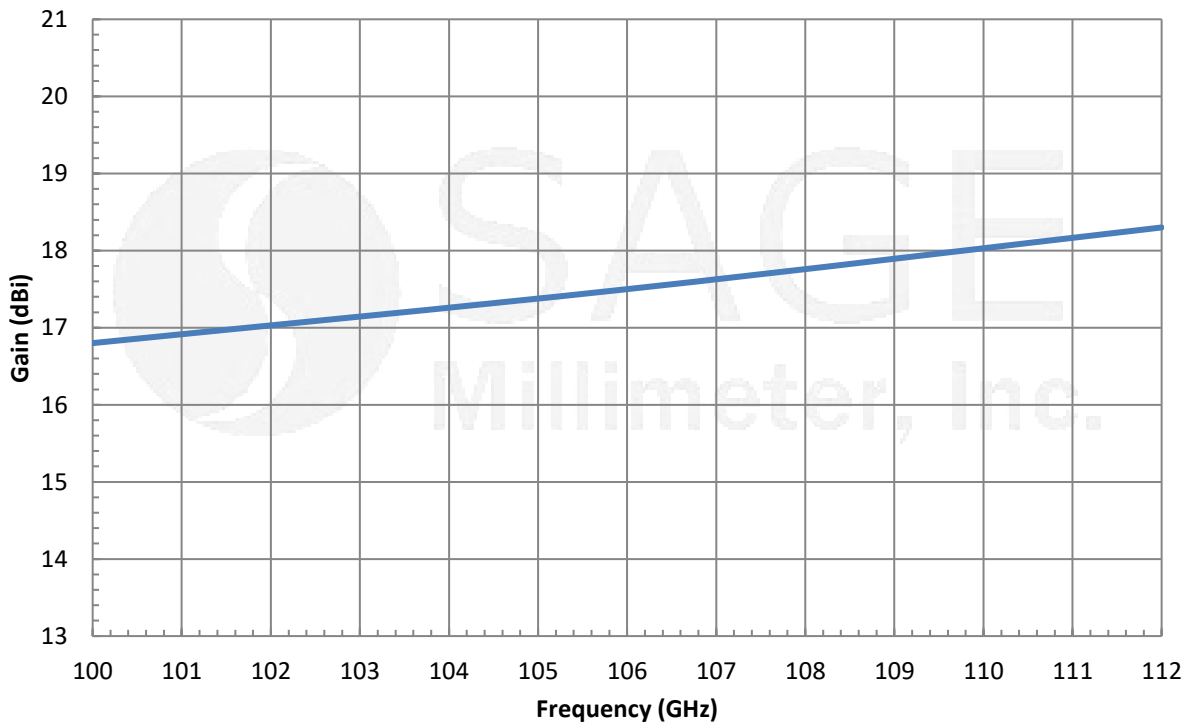



F Band Scalar Feed Horn Antenna, 100 to 112 GHz, 17 dBi Gain

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

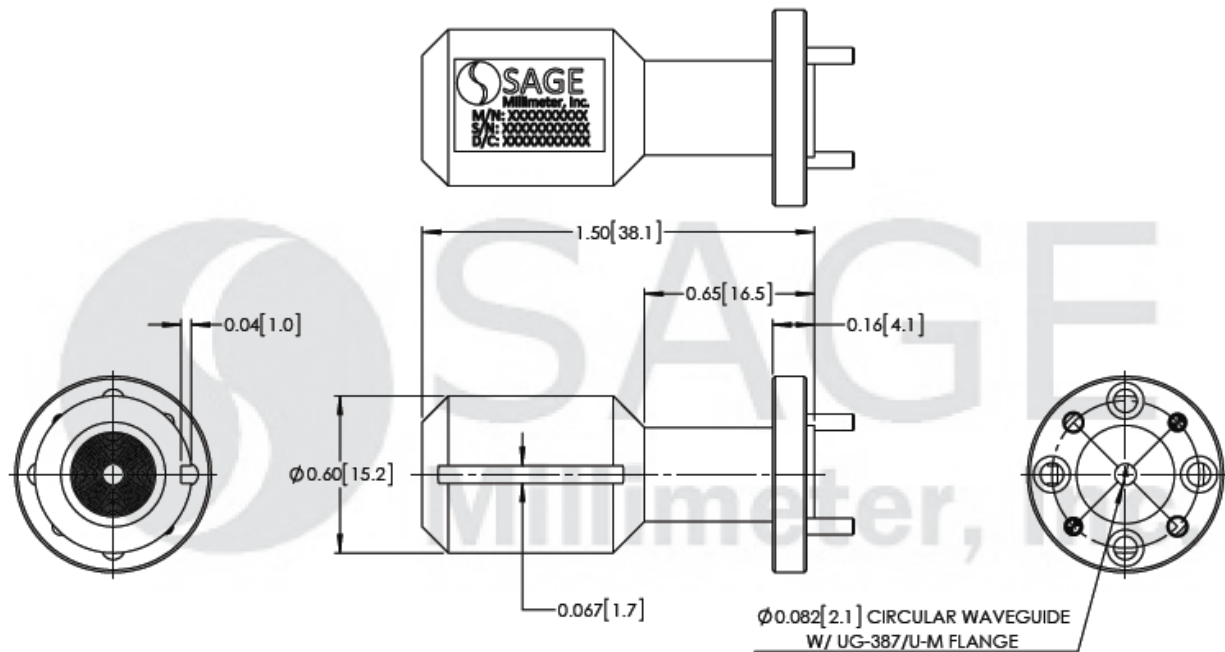

Note:

- All data presented is simulated. Actual data may vary slightly.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the waveguide will cause performance degradation and possible device damage.

