




V Band Gaussian Optics Antenna, 58 to 68 GHz, 36 dBi Gain, 6"

Description:

Model SAG-5836833503-15-S1 is a 6" V-Band Gaussian antenna that operates from 58 to 68 GHz. The Gaussian antenna delivers a 36 dBi nominal gain and 3.0 degree half power beamwidth. The antenna supports linear polarized waveforms and employs a corrugated feed horn to offer excellent aperture efficiency, high cross polarization rejections, and low sidelobe levels. This model is equipped with a standard WR-15 waveguide and UG-385/U flange as its input port. By removing the mode transition, SAGE Millimeter model number SWT-15141-SB, the input port becomes a 0.141" diameter circular waveguide, which can support both linear and circular polarized waveforms.

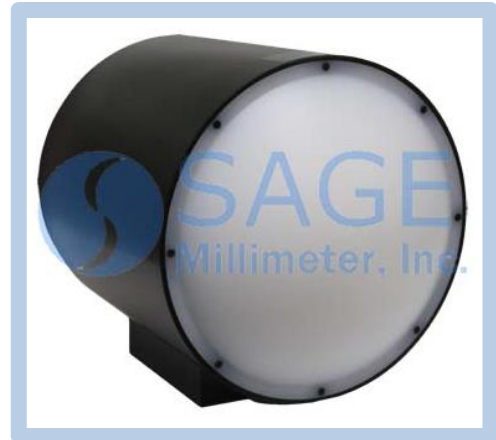

Features:

- Center Fed
- Low Sidelobes
- Low Cross Polarization

Applications:

- Radar Systems
- Communication Systems
- Plasma Systems

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	58 GHz	63 GHz	68 GHz
Gain		36 dBi	
3 dB Beamwidth		3.0°	
Sidelobes			-20 dB
Polarization	Linear		
Return Loss		14 dB	
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

Mechanical Specifications:


Item	Specification
Antenna Port	WR-15 Waveguide with UG-385/U Flange
Material	Aluminum
Finish	Black Anodized
Weight	7.23 lb
Lens Diameter	6.0"
Dimensions	7.31" (H) x 10.31" (L)
Outline	AG-RV36





V Band Gaussian Optics Antenna, 58 to 68 GHz, 36 dBi Gain, 6"

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

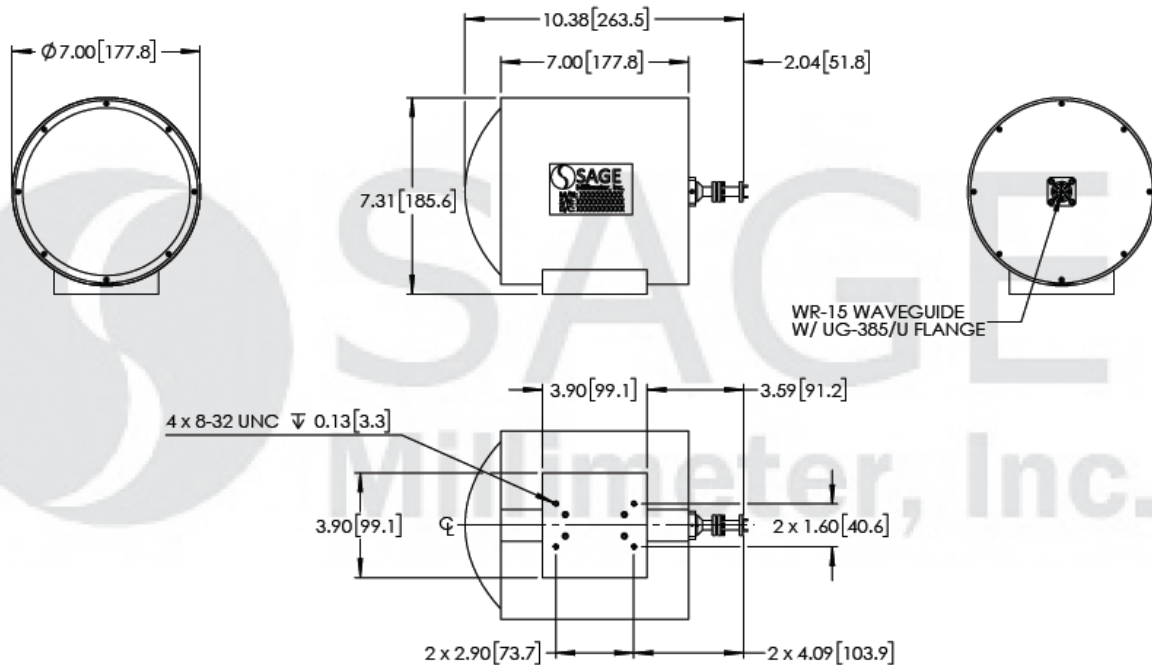

Note:

- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.
- The operation frequency of the antenna can be extended to a wider range with small performance degradation at the edges of the band.

Caution:

- Foreign objects in the waveguide will affect the antenna performance and may damage the antenna.

