SAJ-014-S1-WP

1/3

Trihedral Corner Reflector, 1.4"

SAJ-014-S1-WP is a 1.4" x 1.4" x 1.4" trihedral corner reflector, featuring a rugged aluminum construction with a gold chemical film finish. The trihedral reflector simulates radar target precisely and is widely used for radar system calibration. With a ¼-20 threaded hole for a built in mounting bracket, the reflector can be mounted onto a tripod for rapid system setups.

Mechanical Specifications:

Item	Specification
Mounting	1/4-20 Threaded Hole
Material	Aluminum
Finish	Gold Chemical Film
Weight	0.5 lbs
Edge Length	1.4"
Outline	AJ-S-1.4-RC

ERA\ANT



APPLICATIONS

Compact SizeHigh RCS

ECCN EAR99

FEATURES

• Radar Target Simulator

Rugged Configuration

- Radar System Evaluation
- Radar System Calibration

SUPPLEMENTAL DETAILS




SAJ-014-S1-WP

0.2 -6 -8.2 0.18 0.16 -10.4 Relative Magnitude (dBsm **Radar Cross Section (m^2)** 0.12 0.08 0.08 0.00 -12.6 -14.8 -17 -19.2 -21.4 0.04 -23.6 Radar Cross Section 0.02 -25.8 **Relative Magnitude** 0 -28 20 30 50 60 80 90 10 40 70 100 Frequency (GHz)

Calculated Radar Cross Section and Relative Magnitude

Mechanical Outline: Unless otherwise specified, all dimensions are in inches [millimeters]

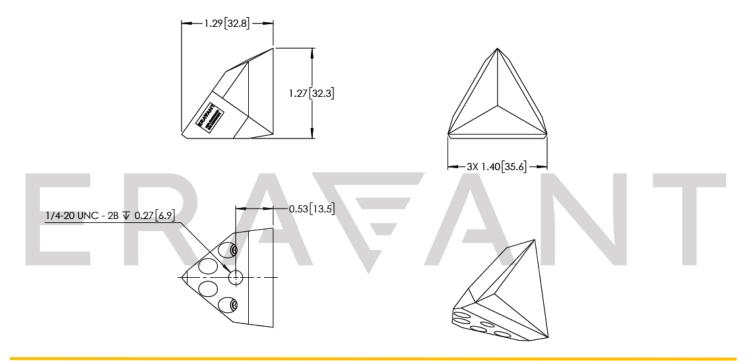

ERAWANT

ERA\ANT

NOTE:

- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.
- For more information on corner reflectors, an informative blog is provided here: https://www.eravant.com/corner-reflectors
- To calculate the RCS and relative magnitude for a specific frequency, an online calculator is provided here: https://www.eravant.com/corner-reflector-calculator

WARNING

SHARP METAL EDGES - SEVERE INJURY RISK

- Handle with extreme caution. Sharp and pointed metal edges can cause severe cuts, punctures, or bodily injury.
- Wear heavy-duty gloves and appropriate protective equipment during handling, assembly, and installation.
- Use care to prevent slips, falls, or accidental contact with the product.
- Do not leave unattended in areas accessible to children or unauthorized personnel.
- Ensure product is securely stored or mounted to minimize risk of accidents.
- Failure to follow these warnings could result in serious injury.
- Eravant assumes no responsibility for injuries resulting from improper handling, installation, or storage of this product.

MAKING MILLIMETERWAVE ACCESSIBLE

ERAFANT MAKING MULLIMETER WAVE ACCESSIBLE