



WR-42 Pyramidal Horn Antenna, 25 dBi Gain

Description:

Model SAR-2507-42-S2 is a K-band pyramidal horn antenna that operates from 18 GHz to 26.5 GHz. The antenna offers 25 dBi nominal gain and a typical half power beamwidth of 7 degrees on the E-plane and 9 degrees on the H-plane. The antenna supports linear polarized waveforms.

The input of this antenna is a WR-42 waveguide with UG-595/U flange.



Features:

- Rectangular Waveguide Interface
- Precisely Machined
- Linear Polarization
- High Return Loss

Applications:

- Antenna Ranges
- Antenna Gain Measurements
- System Setups

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	18 GHz		26.5 GHz
Gain		25 dBi	
Polarization	Linear		
3 dB Beamwidth, E-Plane		7°	
3 dB Beamwidth, H-Plane		9°	
Sidelobes, E-Plane		-14 dB	
Sidelobes, H-Plane		-30 dB	
Return Loss		23 dB	
Specification Temperature		+25 °C	
Operation Temperature	-40 °C		+85 °

Mechanical Specifications:

Item	Specification
Antenna Port	WR-42 Waveguide
Flange Type	UG-595/U Flange
Size	10.10" (L) X 4.27" (W) X 3.41" (H)
Material	Aluminum
Finish	Inside: Silver Plated; Outside: Black Paint
Weight	4.5 Oz
Outline	AR-K3




www.eravant.com | 501 Amapola Avenue, Torrance, CA 90501
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: support@eravant.com




WR-42 Pyramidal Horn Antenna, 25 dBi Gain

Simulated Antenna Patterns @ 18 GHz

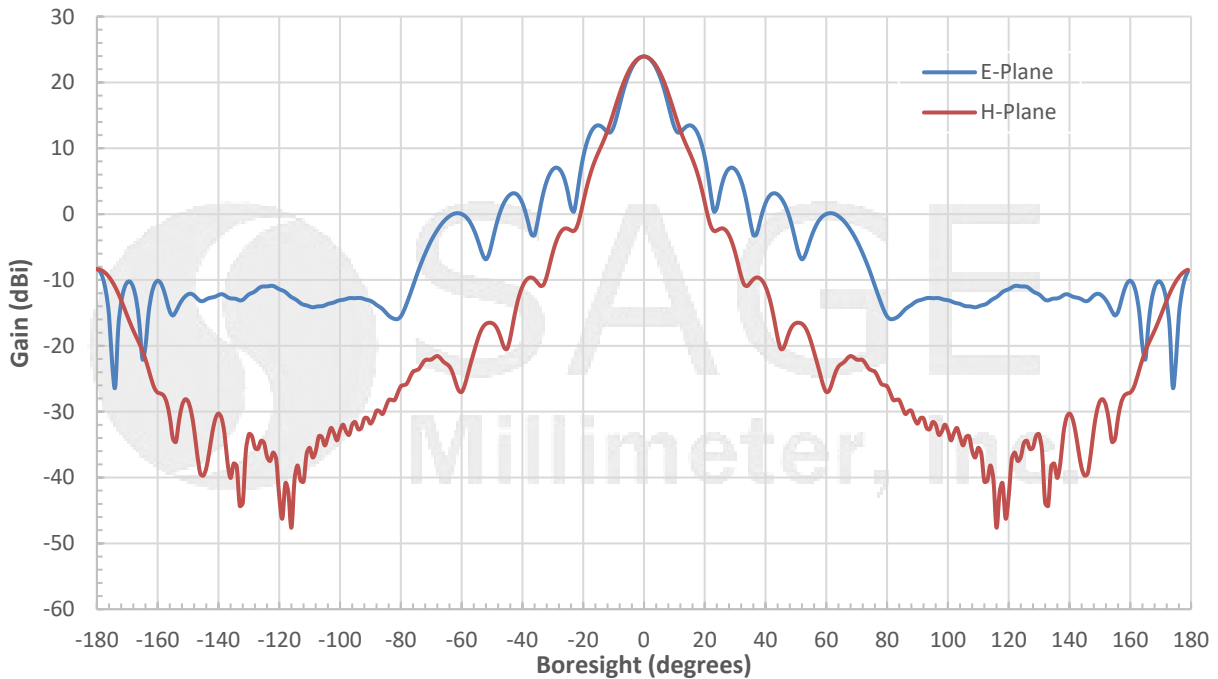

Simulated Antenna Patterns @ 22.25 GHz

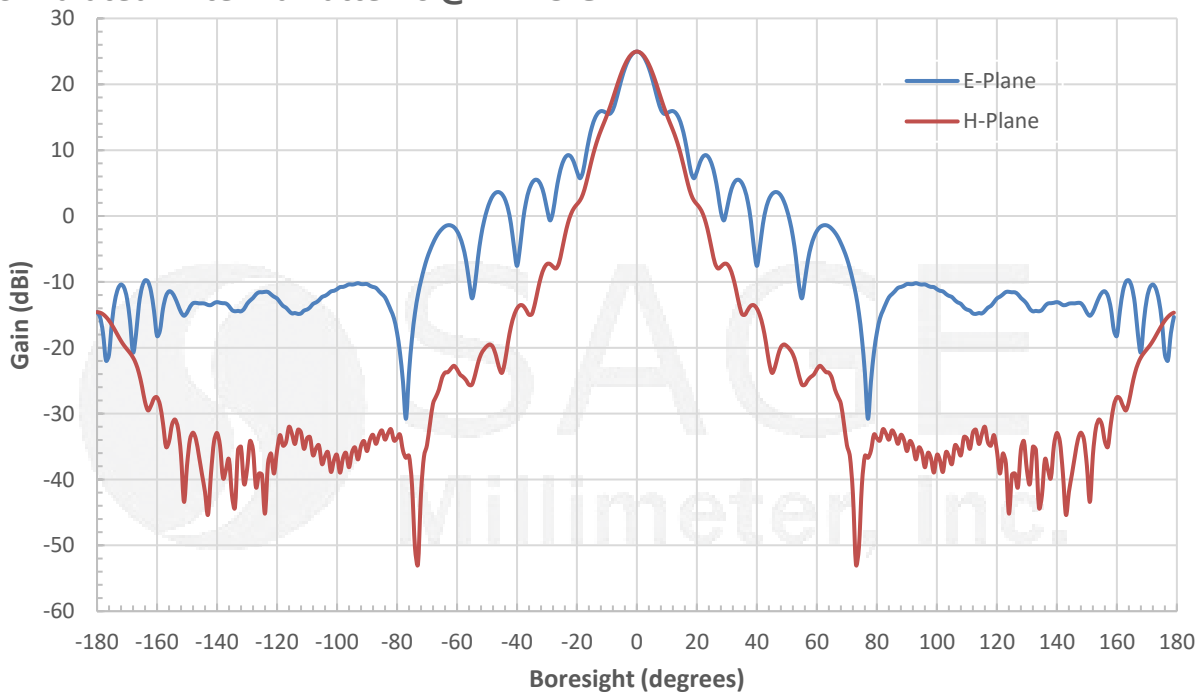


www.eravant.com | 501 Amapola Avenue, Torrance, CA 90501
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: support@eravant.com




WR-42 Pyramidal Horn Antenna, 25 dBi Gain

Simulated Antenna Patterns @ 26.5 GHz

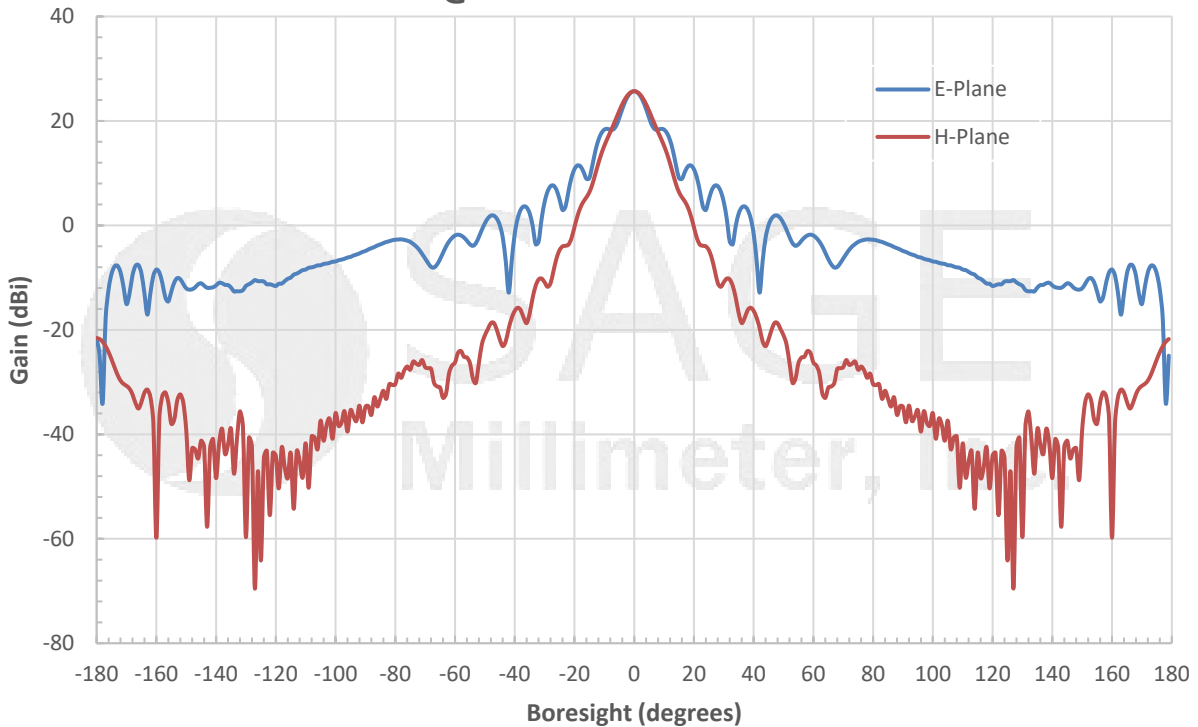

Simulated Return Loss vs. Frequency

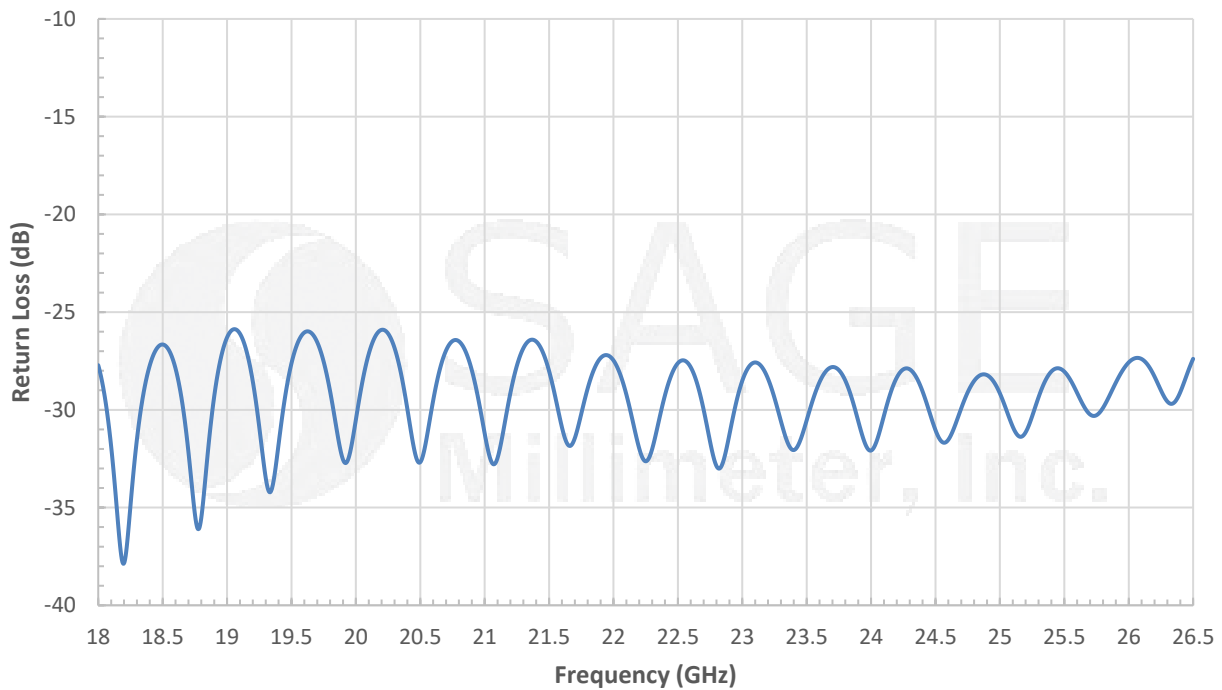


www.eravant.com | 501 Amapola Avenue, Torrance, CA 90501
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: support@eravant.com




WR-42 Pyramidal Horn Antenna, 25 dBi Gain

Simulated Gain vs. Frequency

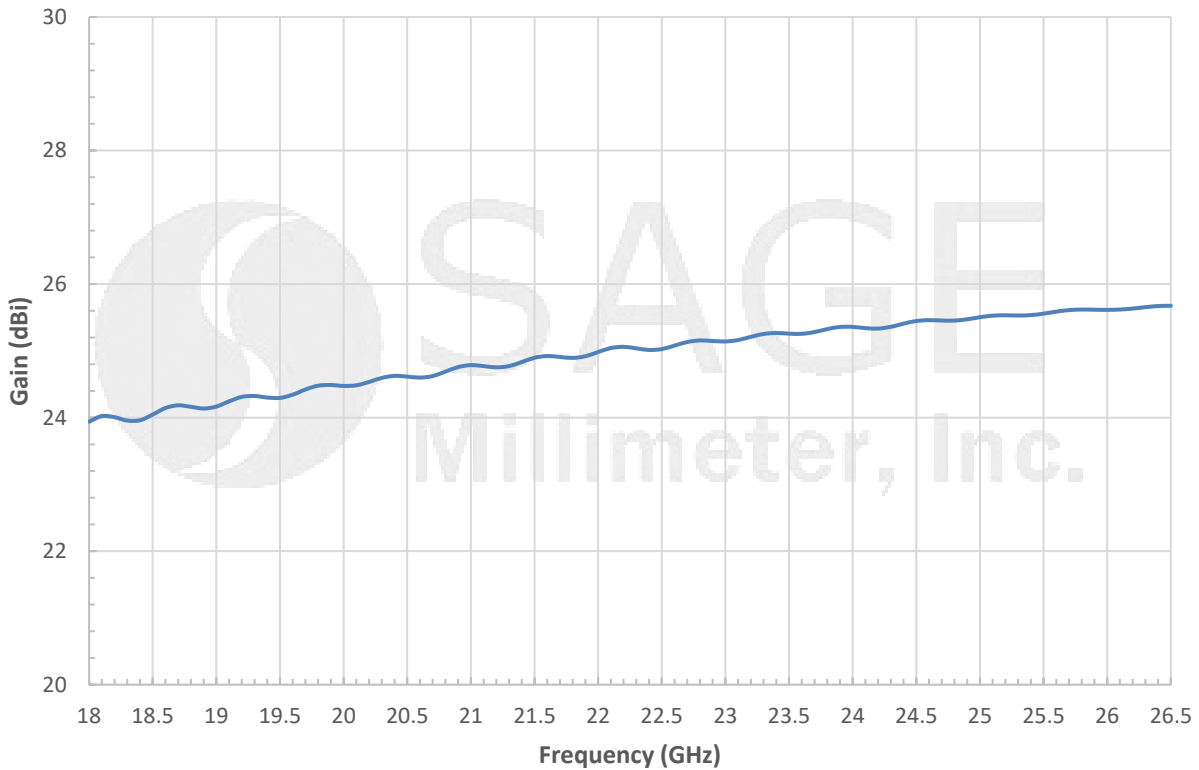

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

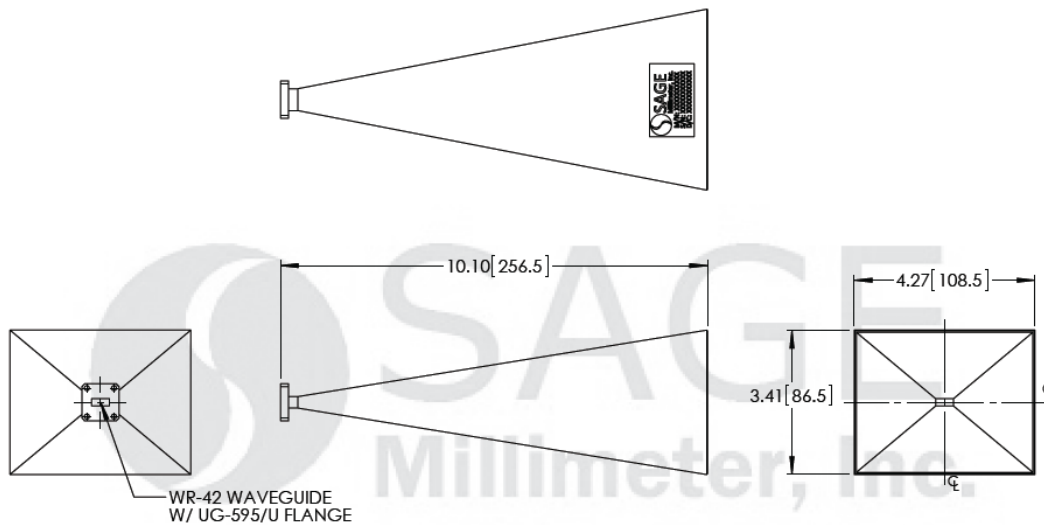

www.eravant.com | 501 Amapola Avenue, Torrance, CA 90501
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: support@eravant.com



WR-42 Pyramidal Horn Antenna, 25 dBi Gain

Note:

- This antenna is a mature product. The reasons for only providing simulated data can be found in the following blog [here](#).
- Eravant reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the waveguide will cause performance degradation and possible device damage.

