

# WR-04 E-Plane Waveguide Bend, 45°

### **Description:**

**Model SWB-04045-EB** is a 45 degree, WR-04 E-plane waveguide bend with UG-387/U-M anti-cocking flanges. The bend Radius is 0.75". The waveguide bend is manufactured through a precision machining process to ensure high quality and ruggedness. The waveguide is offered to cover the frequency range of 170 to 260 GHz.



### **Features:**

- Frequency Coverage: 170 to 260 GHz
- Rugged Waveguide Configuration
- Low Insertion Loss


## **Applications:**

- Test Instrumentation
- Sub-assemblies
- Lab Use

### **Mechanical Specifications:**

Item	Specification
Waveguide Size	WR-04 Waveguide with UG-387/U-M Anti-Cocking Flange
Bend Plane	E Plane
Bend Angle	45 Degrees
Bend Radius	0.75"
Flange Material	Brass
Waveguide Material	Copper
Finish	Gold Plated
Outline	WB-E04-5-A

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches)

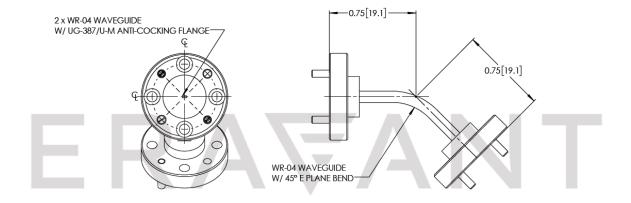

### Note:

Eravant reserves the right to change the information presented without notice.



www.eravant.com | 501 Amapola Avenue, Torrance, CA 90501 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: support@eravant.com