



WR-15 Dual Polarized Scalar Feed Horn Antenna, 50 to 75 GHz, 13 dBi

Description:

SAF-5037531340-165-S1-148-DP is a dual polarized, WR-15 scalar feed horn antenna assembly that covers several popular 5G bands in the frequency range of 50 to 75 GHz. The antenna features an integrated orthomode transducer (OMT) that provides high port isolation and a broad band scalar horn that provides low sidelobe levels. The OMT enables the antenna to separate a circular or elliptical polarized waveform into two linear, orthogonal waveforms or vice versa. The dual polarized horn also supports either vertical or horizontal polarized waveguide forms. At center frequency, the horn antenna exhibits 13 dBi nominal gain and a typical half power beamwidth of 40 degrees and -25 dB sidelobe levels, respectively. The antenna exhibits 30 dB typical port isolation between the horizontal and vertical ports. The horizontal and vertical ports are WR-15 waveguides with UG-385/U-M anti-cocking flanges and 4-40 threaded holes.



Features:

- 50 to 75 GHz Operations
- Linear and Circular Polarizations
- High Port Isolation

Applications:

- IEEE 802.11.ad WiGig Systems
- 5G Systems
- Communication Systems
- Circular and Linear Waveform Separation and Combination

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	50 GHz	62.5 GHz	75 GHz
Gain		13 dBi	
3 dB Beamwidth, E-plane		40°	
3 dB Beamwidth, H-plane		40°	
Sidelobe Levels		-25 dB	
V and H Port Isolation		30 dB	
Port Return Loss		15 dB	
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

Mechanical Specifications:


Item	Specification
Horizontal and Vertical Ports	WR-15 Waveguide with UG-385/U-M Threaded Anti-Cocking Flange
Material	Aluminum, Brass
Finish	Gold Plated
Weight	0.1 lbs
Size	2.75" (L) x 0.8" (W) x 0.8" (H)
Outline	AF-CV13-165-148-DP






WR-15 Dual Polarized Scalar Feed Horn Antenna, 50 to 75 GHz, 13 dBi

Simulated Gain vs. Frequency

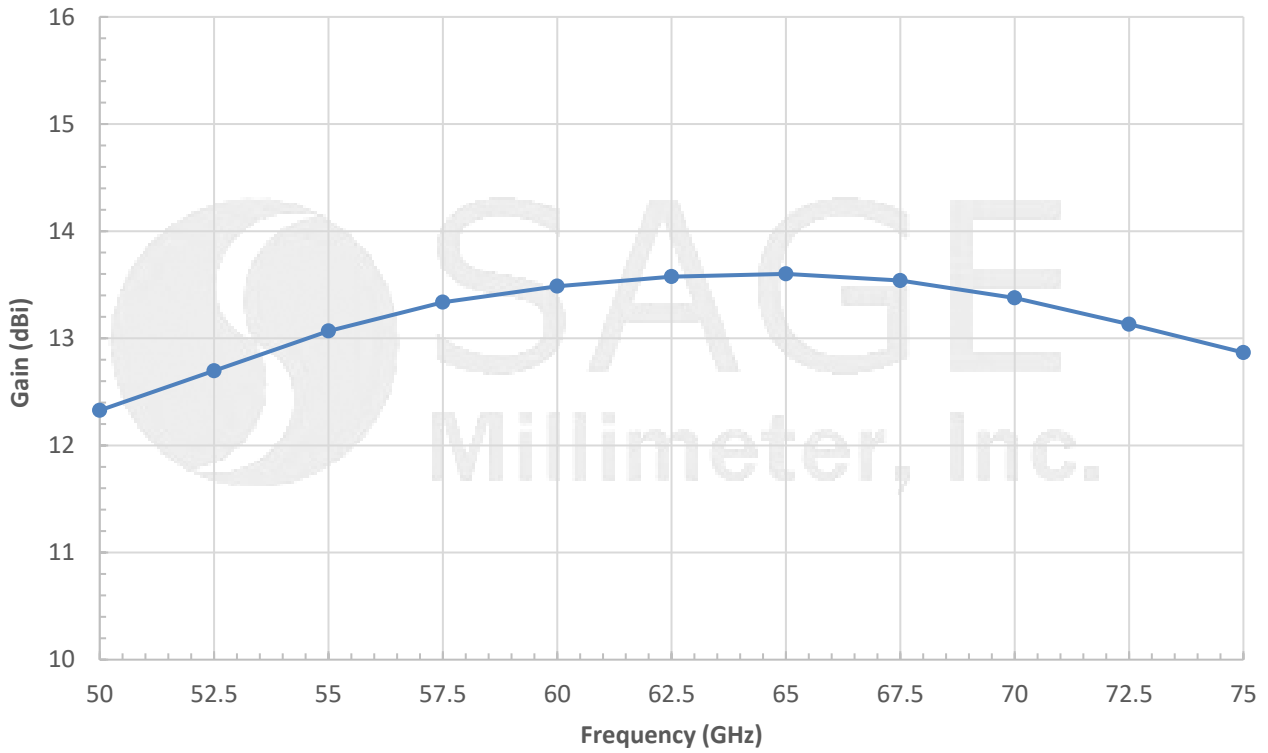


Simulated E and H Plane 3 dB Beamwidth vs. Frequency

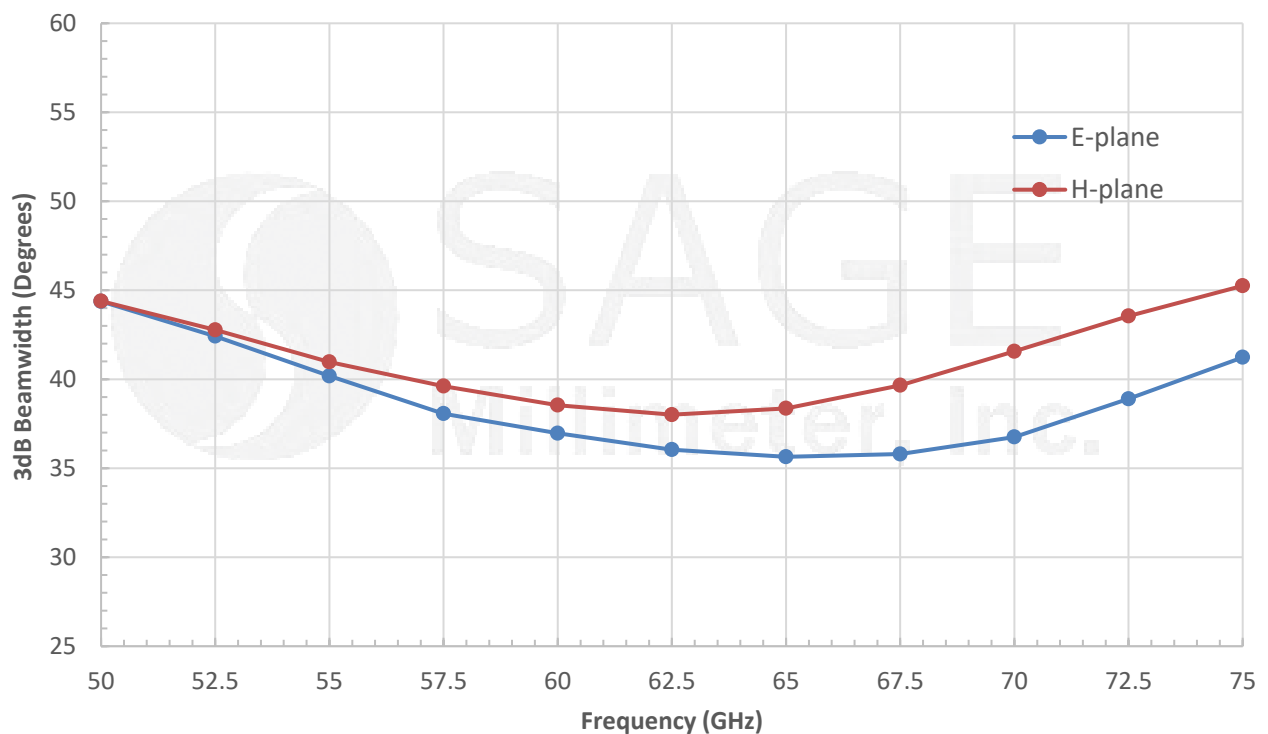




WR-15 Dual Polarized Scalar Feed Horn Antenna, 50 to 75 GHz, 13 dBi

Simulated Antenna Patterns @ 50 GHz

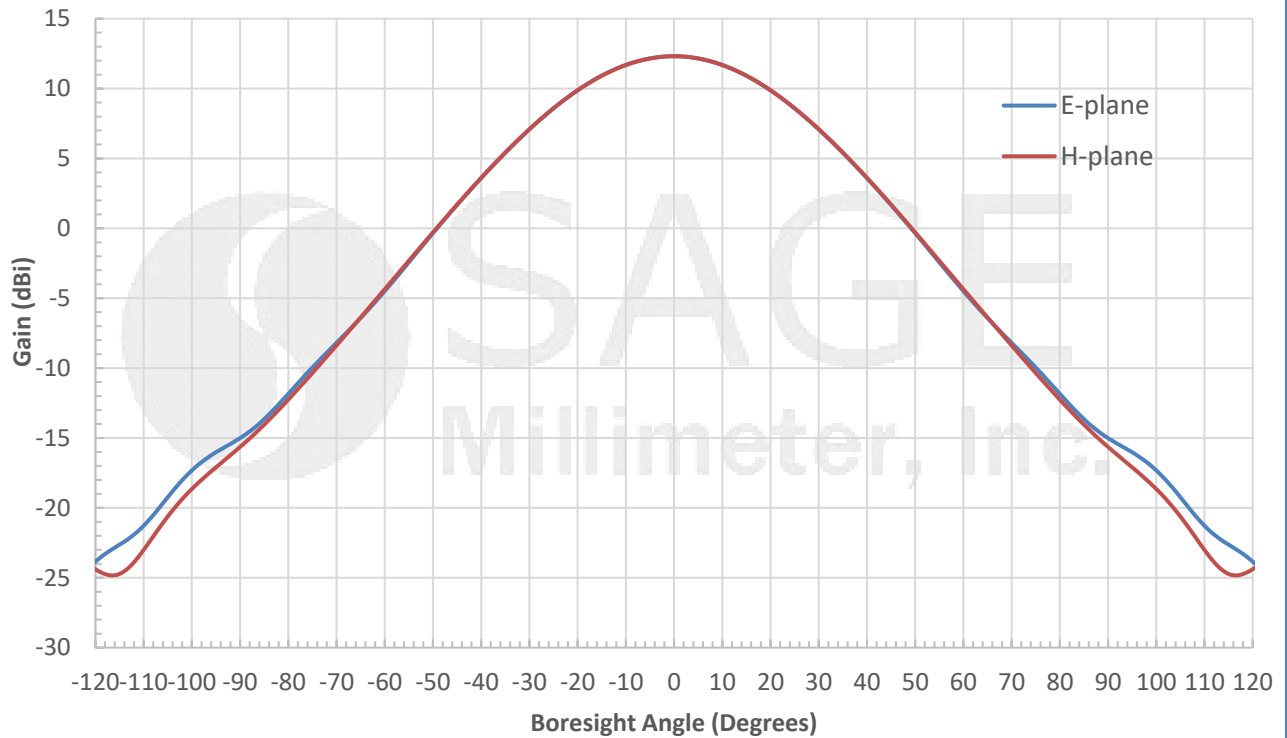


Simulated Antenna Patterns @ 60 GHz

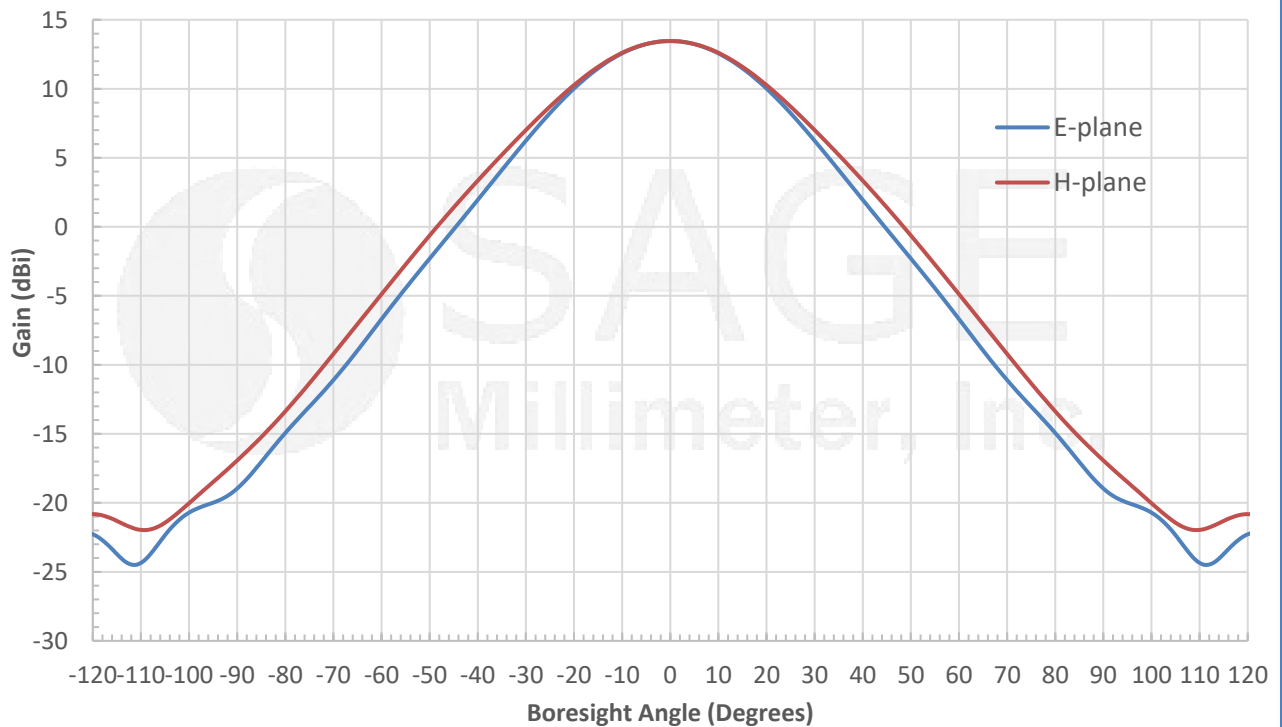




WR-15 Dual Polarized Scalar Feed Horn Antenna, 50 to 75 GHz, 13 dBi

Simulated Antenna Patterns @ 70 GHz

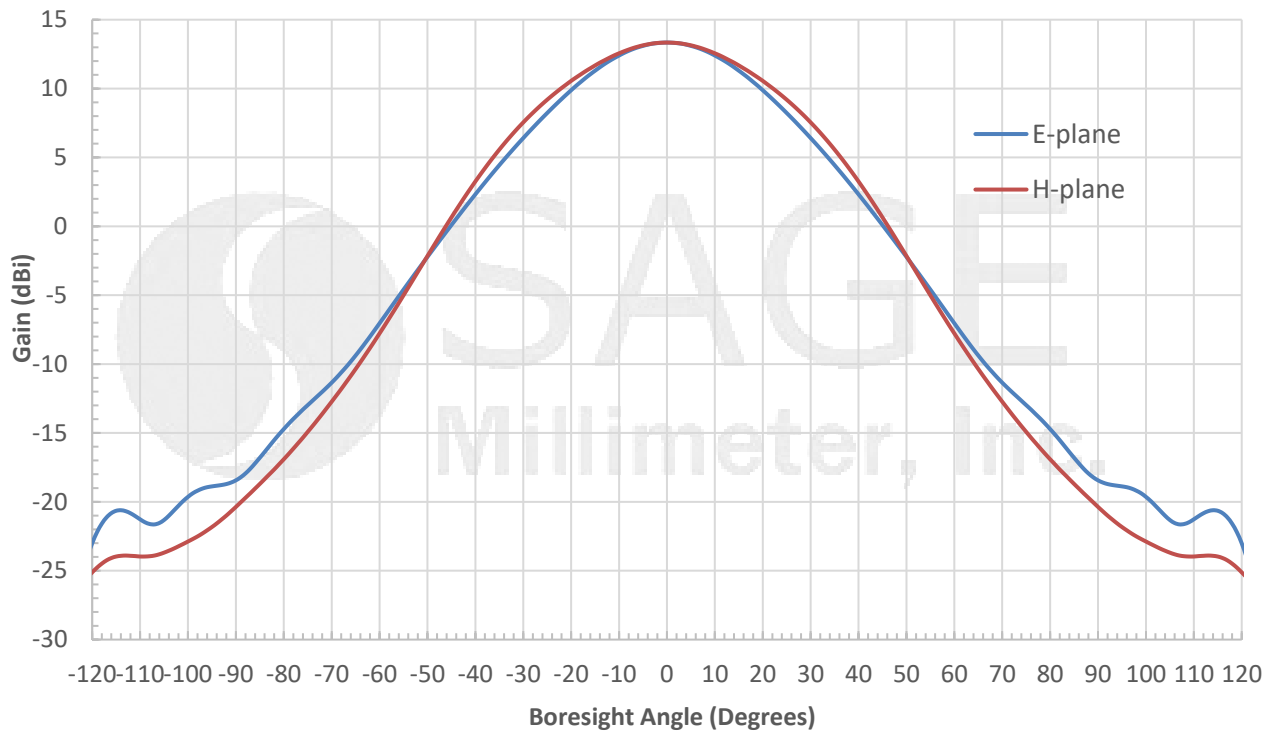


Simulated Antenna Patterns @ 75 GHz

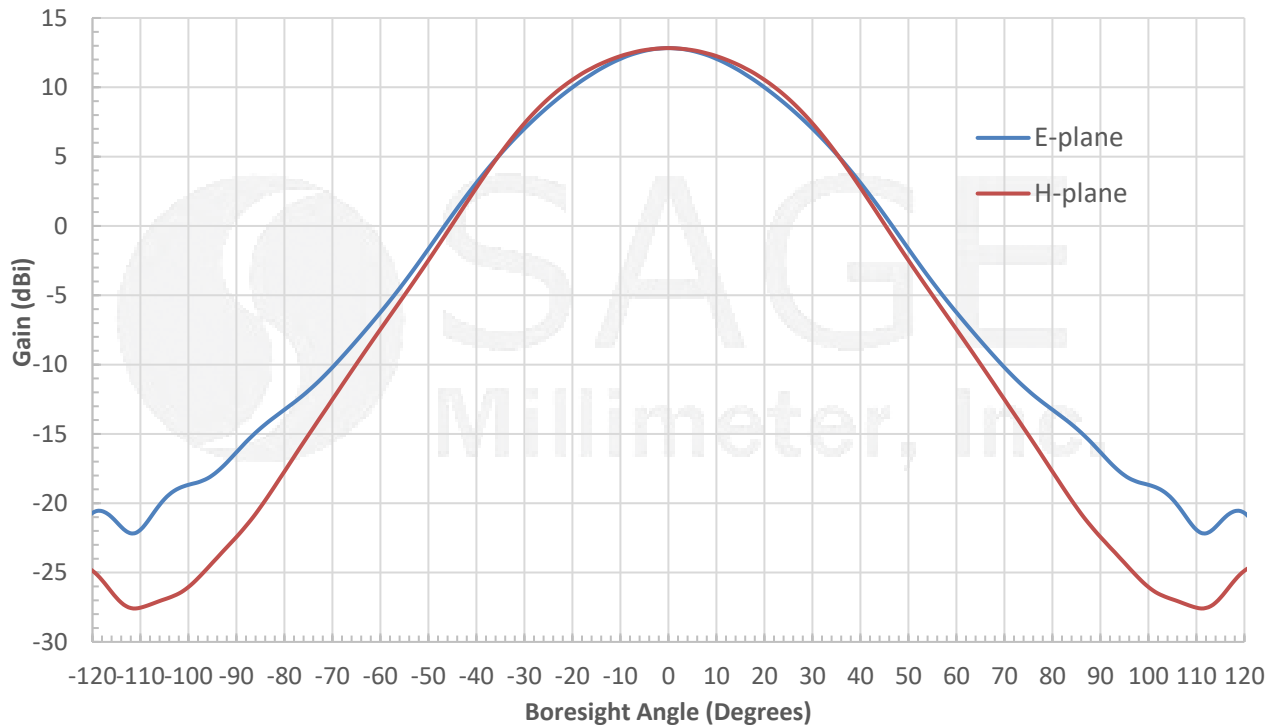




WR-15 Dual Polarized Scalar Feed Horn Antenna, 50 to 75 GHz, 13 dBi

Typical Return Loss vs. Frequency

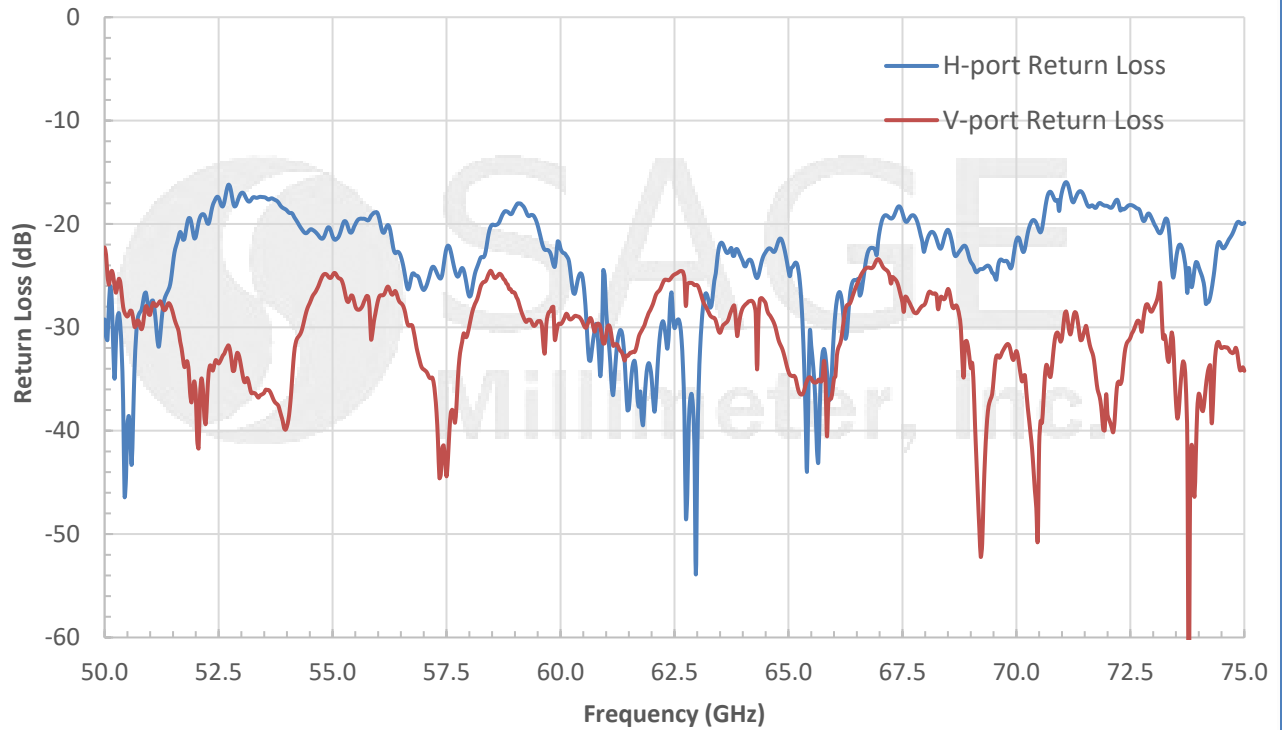


Typical Isolation vs. Frequency

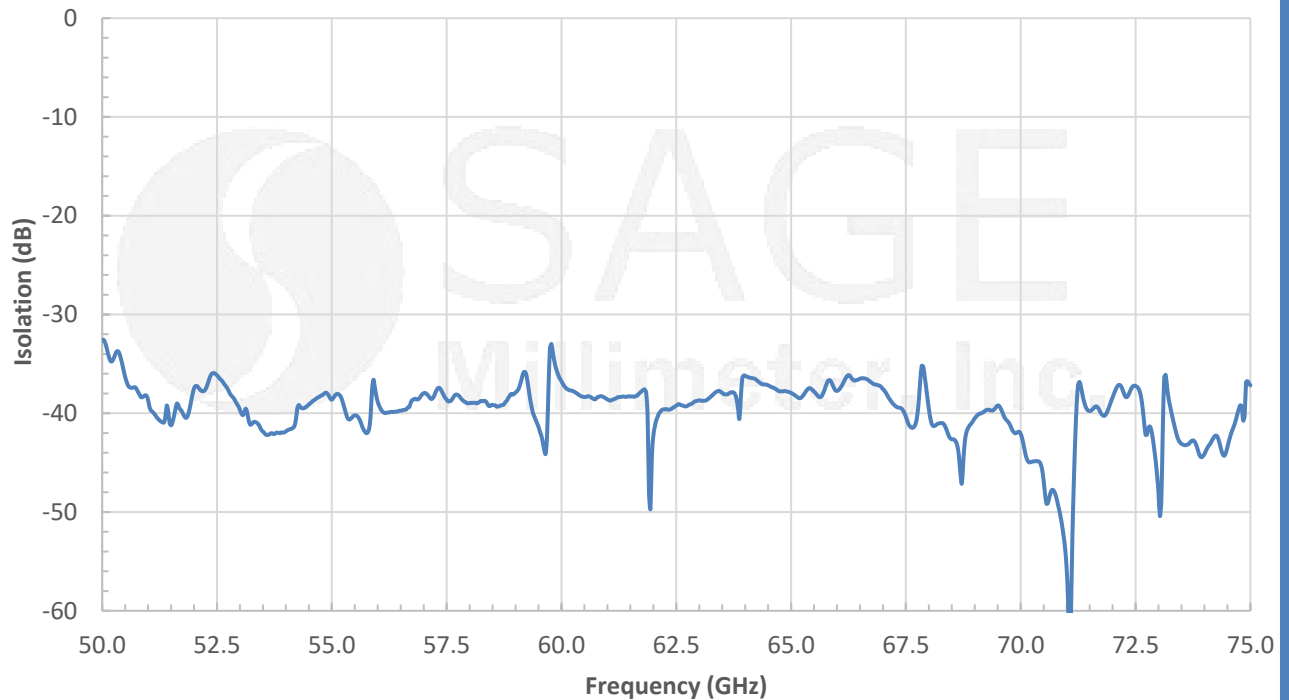

www.eravant.com | 501 Amapola Ave, Torrance, CA 90501
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: support@eravant.com

WR-15 Dual Polarized Scalar Feed Horn Antenna, 50 to 75 GHz, 13 dBi

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

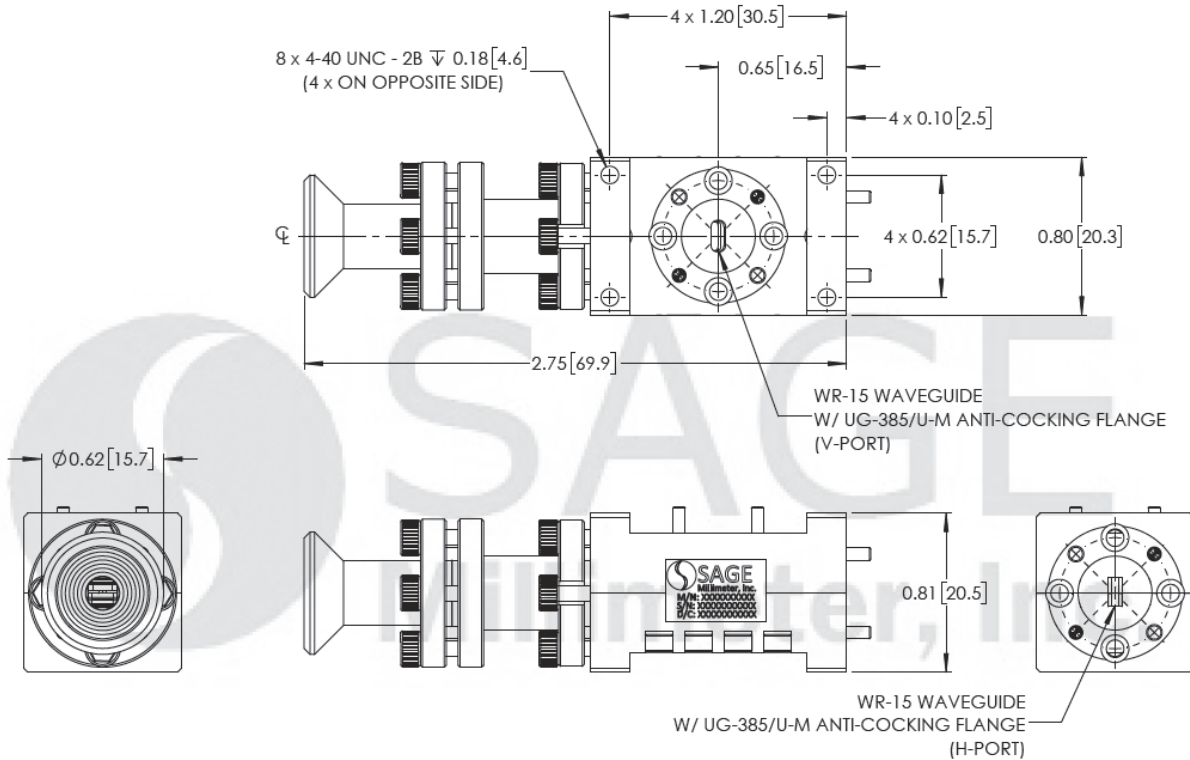

Note:

- Antenna Patterns, Gain and 3 dB Beamwidth are simulated. Actual data may vary.
- Port Return Loss and Isolation data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25 °C room temperature.
- Eravant reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the antenna will cause performance degradation and possible device damage.

