

SCM-KM33-UB

2.92 mm (M) Coaxial Matching Load, 2 Watt

SCM-KM33-UB is a 2.92 mm male coaxial matching load that covers the frequency range of DC to 40 GHz. The coaxial matching load exhibits a typical return loss of 19 dB. It is designed and manufactured to offer a good match for system applications. The characteristic impedance of the matching load is 50 Ohms and the power handling is 2 Watts. The female version is available under the model number SCM-KF33-UB.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	DC		40 GHz
Return Loss @ DC to 40 GHz		19 dB	
Impedance		50 Ω	
Power Handling (Average)*			2 W (CW)
Power Handling (Peak)*			20 W
Specification Temperature		+25 $^{\circ}$ C	
Operating Temperature	-40 $^{\circ}$ C		+125 $^{\circ}$ C

*2 W average to 25 $^{\circ}$ C ambient temperature, derated linearly to 0.5 W @ 125 $^{\circ}$ C

*20 W @ 5 μ s pulse width with maximum 1% duty cycle

Mechanical Specifications:

Item	Specification
Connector Type	2.92 mm (K) Male
Material	Stainless Steel
Finish	Passivated
Weight	0.2 Oz
Length	0.67"
Outline	CM-KM-33-2

ECCN

EAR99

FEATURES

- High Return Loss
- 50 Ohms

APPLICATIONS


- Test Lab
- Sub-assemblies
- System Integration

SUPPLEMENTAL DETAILS




SCM-KM33-UB

Typical Return Loss vs. Frequency

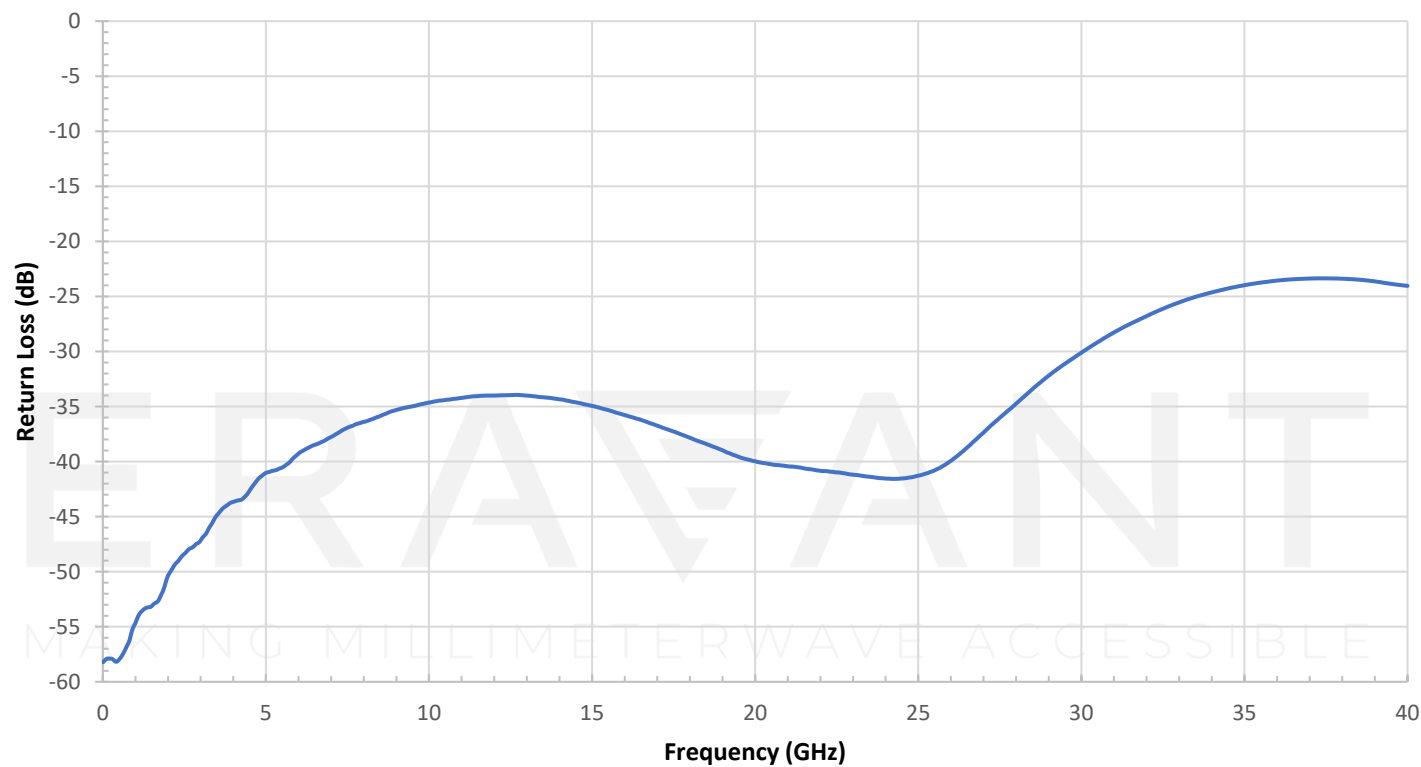

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

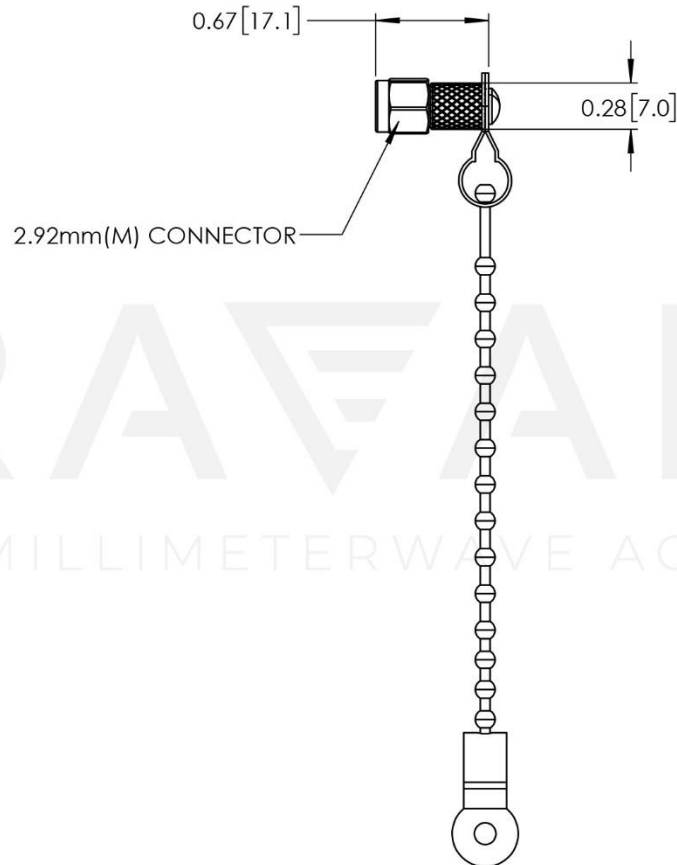

NOTE:

- All data presented is collected from a sample lot. Actual data may vary slightly from unit to unit.
- All testing is performed under +25 °C case temperature.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- Exceeding absolute maximum ratings shown will damage the device.
- Proper torque should be applied: 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm). Torque wrench model SCH-08008-S1 is highly recommended.