

## STQ-WB-03090-T1-1.0

### WR-03 Band Waveguide Twist, 90 Degrees, 1", Precision Machined, Metrology Grade

**STQ-WB-03090-T1-1.0** is a 90 degree, WR-03 waveguide twist with UG-387/U-M precision anti-cocking flanges. The waveguide twist covers the frequency range of 220 to 330 GHz. The waveguide twist is manufactured with precision machining as a split-block body, which results in a robust, reinforced mechanical structure that will not flex or bend compared to traditional waveguide sections made with thin-wall tubing and brazed joints. Other lengths are available under different model numbers.



#### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	220 GHz		330 GHz
Insertion Loss*		2.5 dB	
Return Loss		18 dB	
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

\*Performance may be reduced at band edges.

#### Mechanical Specifications:

Item	Specification
Waveguide Port	WR-03 Waveguide with UG-387/U-M Precision Anti-Cocking Flange
Length (L)	1.0"
Material	Brass
Finish	Gold Plated
Weight	1.0 Oz
Outline	WB-T03-A-SB-L

#### ECCN

EAR99

#### FEATURES

- Frequency Range: 220 to 330 GHz
- Sturdy Split-Block Mechanical Structure

#### APPLICATIONS


- Test Labs
- Instrumentations
- Sub-assemblies

#### SUPPLEMENTAL DETAILS




STQ-WB-03090-T1-1.0

Typical Performance vs Frequency

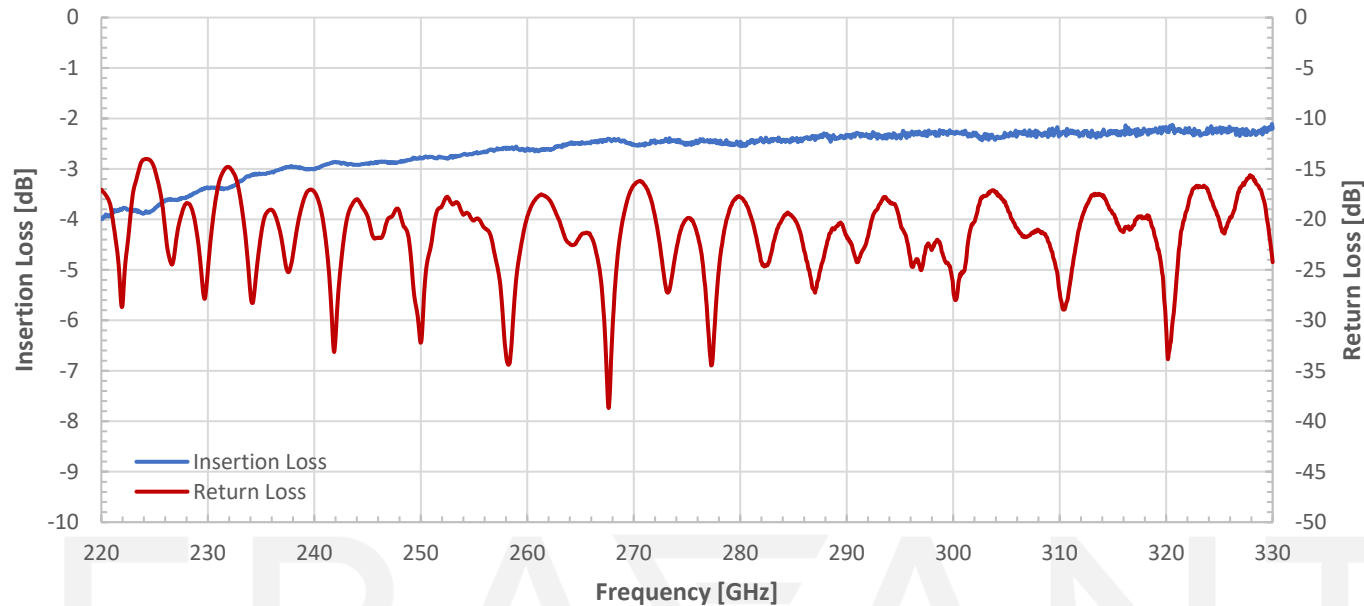

Mechanical Outline:

Unless otherwise specified, all dimensions are in inches [millimeters]

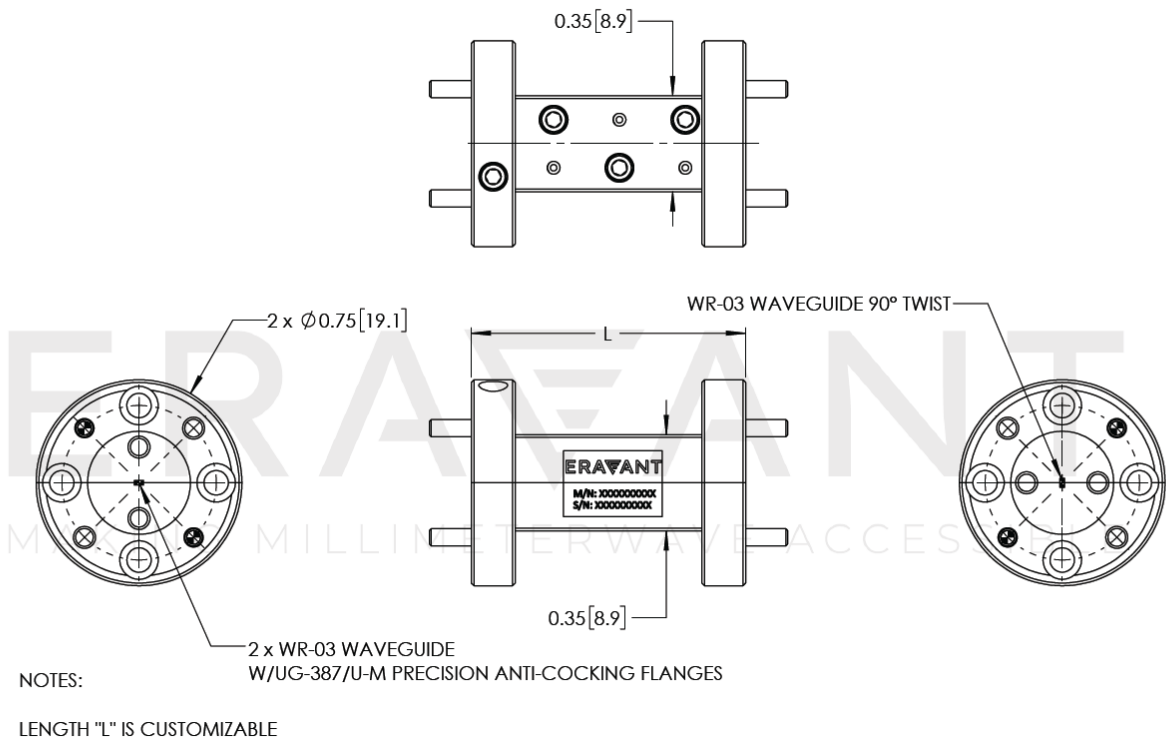

**NOTE:**

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

**CAUTION:**

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.

ERAVANT  
MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT  
MAKING MILLIMETERWAVE ACCESSIBLE