




Universal Heatsink, 95 Watt Power Dissipation Capacity, Uni-Guide™ Compatible

Description:

Model SUA-95-S2-3 is a universal heatsink, which is designed and fabricated for SAGE Millimeter’s active device applications with up to 95 watt power dissipation. The heatsink consists the main heatsink body, a DC fan and a heat spreader. The heat spreader is also known as adapter, which is used to bridge the mounting gap between the heat sink main body and the to-be-heat-sunk devices, such as power amplifier, frequency active multiplier, oscillator, transmitter and transceiver due to various mounting hole locations. The heat spreader offers various mounting patterns to accommodate more than 15 product models. This heatsink is not only designed for SAGE Millimeter’s standard products and Uni-Guide™ featured products, but also for many industrial standard microwave and millimeterwave products offered by other manufacturers. Other heatsinks with different power dissipation capacities are offered under different model numbers.

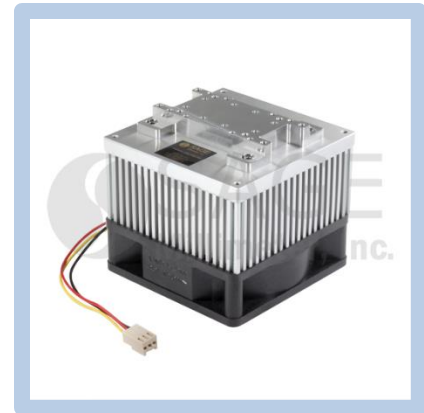

Features:

- High Power Dissipation Efficiency
- DC Powered Cooling Fan
- Heat Spreader for Various Mounting Patterns
- Easy Mounting and Dismounting

Applications:

- Single Function Components
- Sub-assemblies
- Lab Use

Electrical Specifications:

Item	Specification
Fan Power	+12 V _{dc}
Fan Power Designations	Red Lead (Positive); Black Lead (GND)
DC Connector	Molex 5051-03
Fan Detachability	Yes


Mechanical Specifications:

Item	Specification
Mounting Screw	2-56 x 5/8" Long, 4 Pieces
Material	Aluminum
Finishing	Clear Chem Film
Weight	2.2 Oz
Dimensions	3.15" x 3.15" x 2.92"
Outline	UA-95-5



Universal Heatsink, 95 Watt Power Dissipation Capacity, Uni-Guide™ Compatible

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches)

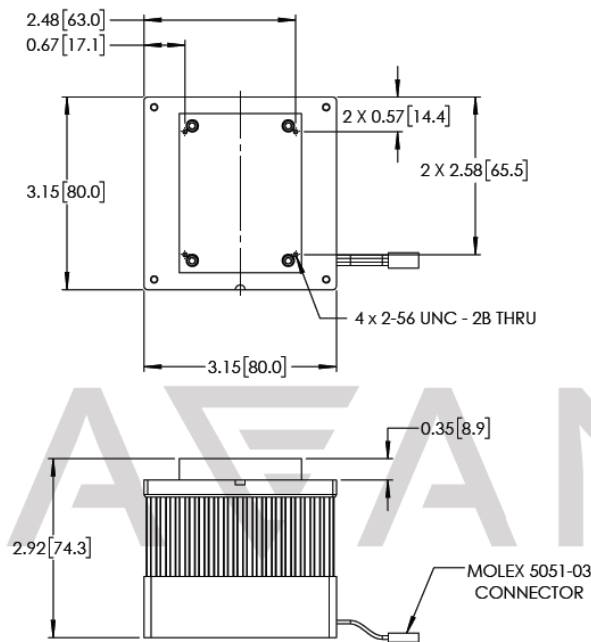

MOLEX 5051-03	
WIRE	SIGNAL
BLACK	GND
RED	+12VDC

Note:

SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

