

SWB-03045L-TB-2.0

WR-03 Waveguide Twist, 45° Left-Handed, 2” Long

SWB-03045L-TB-2.0 is a 45 degree, WR-03 left-handed waveguide twist with UG-387/U-M anti-cocking flanges. The length of the twist is 2.0”. The waveguide twist is manufactured through a precision machining process to ensure high quality and ruggedness. The waveguide is offered to cover the frequency range of 220 to 330 GHz.



Mechanical Specifications:

Item	Specification
Waveguide Size	WR-03 Waveguide with UG-387/U-M Anti-Cocking Flange
Twist Angle	45°
Twist Orientation	Left-Handed
Insertion Length	2.0”
Flange Material	Brass
Waveguide Material	Copper
Finish	Gold Plated
Weight	0.6 Oz
Outline	WB-T03-5-A-L

ECCN

EAR99

FEATURES

- Frequency Range: 220 to 330 GHz
- Rugged Waveguide Configuration
- Low Insertion Loss

APPLICATIONS


- Test Instrumentations
- Sub-assemblies
- Lab Use

SUPPLEMENTAL DETAILS



SWB-03045L-TB-2.0

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

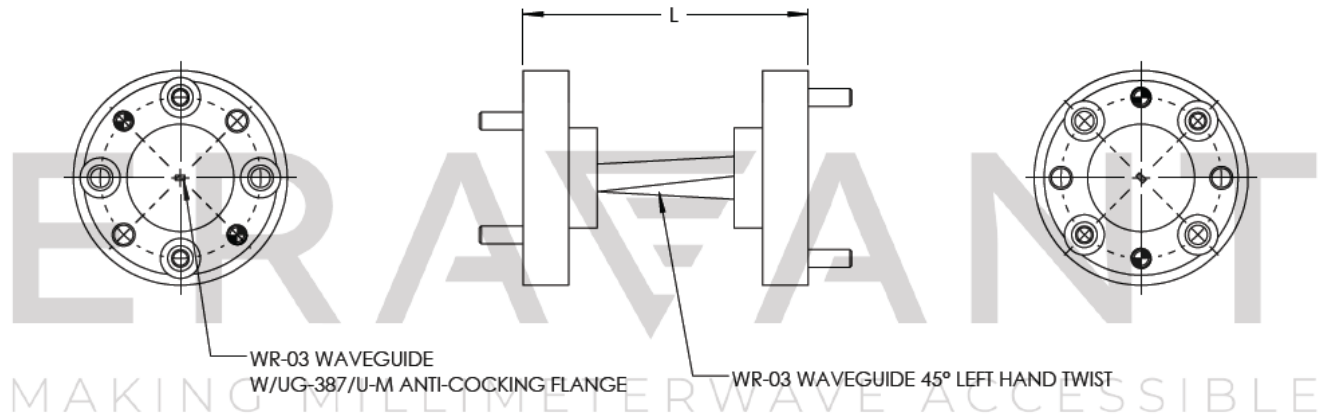

NOTE:

- Eravant reserves the right to change the information presented without notice.

CAUTION:

- Any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.
- For 1 mm connectors proper torque should be applied: 4.0 ± 0.15 inch-pounds (0.45 ± 0.02 Nm). Torque wrench model SCH-06004-S1 is highly recommended.
- For 1.35 mm, 1.85 mm, 2.4 mm, 2.92 mm, and SMA connectors proper torque should be applied: 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm). Torque wrench model SCH-08008-S1 is highly recommended.