


SWB-34045R-TB-2.5

WR-34 Waveguide Twist, 45° Right-Handed, 2.5"

**SWB-34045R-TB-2.5** is a 45 degree, WR-34 right-handed waveguide twist with UG-1530/U square flanges. The length of the twist is 2.5". The waveguide twist is manufactured through a precision machining process to ensure high quality and ruggedness. The waveguide is offered to cover the frequency range of 22 to 33 GHz.

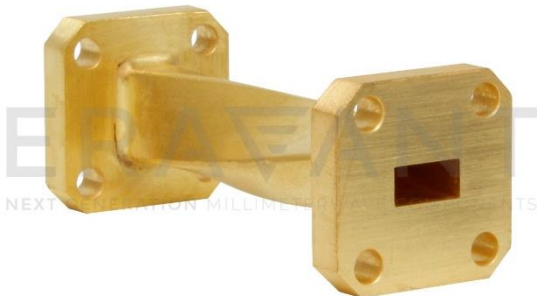

Mechanical Specifications:

Item	Specification
Waveguide Size	WR-34 Waveguide with UG-1530/U Flanges
Twist Angle	45 Degrees
Twist Orientation	Right-Handed
Insertion Length	2.5"
Flange Material	Brass
Waveguide Material	Copper
Finish	Gold Plated
Outline	WB-T3-5R-L

ECCN

EAR99

FEATURES

- Frequency Coverage: 22.0 to 33.0 GHz
- Rugged Waveguide Configuration
- Low Insertion Loss

APPLICATIONS


- Test Instrumentation
- Sub-assemblies
- Lab Use

SUPPLEMENTAL DETAILS



SWB-34045R-TB-2.5

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

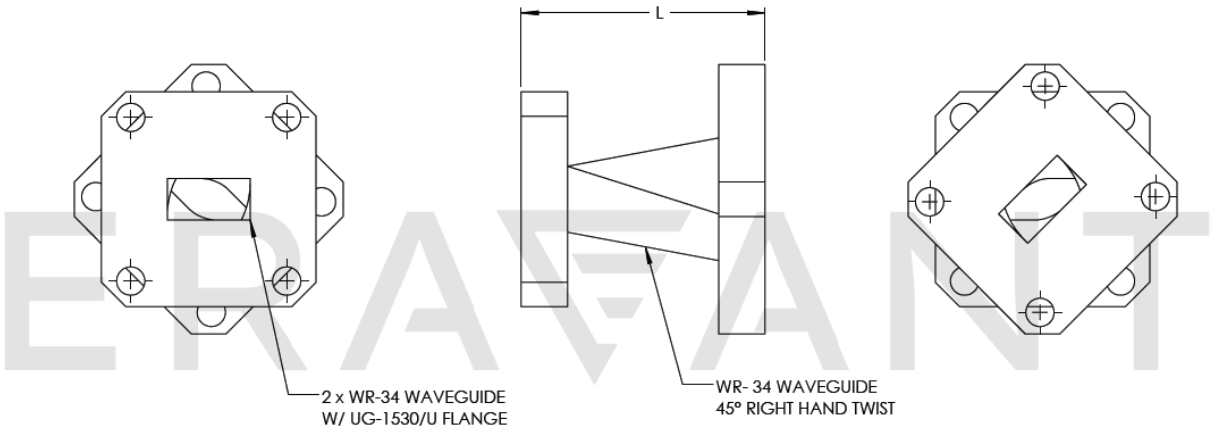

**NOTE:**

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

**CAUTION:**

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.