

SWG-06040-FB

WR-06 Straight Waveguide Section, 4"

SWG-06040-FB is a 4" long, D-band straight waveguide section with a WR-06 waveguide and UG-387/U-M anti-cocking flanges. The straight waveguide is manufactured with a precision machining process to ensure high quality and ruggedness. The waveguide is offered to cover the frequency range of 110 to 170 GHz.



Mechanical Specifications:

Item	Specification
RF Ports	WR-06 Waveguide with UG-387/U-M Anti-Cocking Flange
Insertion Length	4.0"
Flange Material	Brass
Waveguide Material	Copper
Finish	Gold Plated
Weight	0.9 Oz
Outline	WG-FD-A-L

ECCN

EAR99

FEATURES

- Frequency Range: 110 to 170 GHz
- Rugged Waveguide Configuration
- Low Insertion Loss

APPLICATIONS


- Test Instrumentation
- Sub-assemblies

SUPPLEMENTAL DETAILS



SWG-06040-FB

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

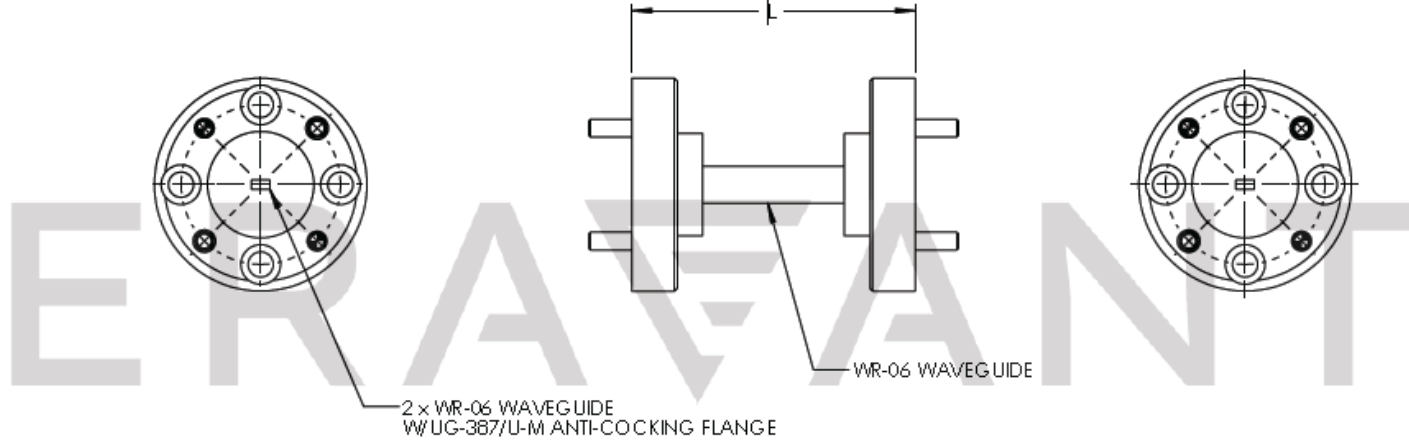

NOTES:

LENGTH "L" IS CUSTOMIZABLE

NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.