


SWI-34208-SB

WR-34 Waveguide Spacer, 208 Mils, 3/8 λg

SWI-34208-SB is a 0.208" thick, 3/8 wavelength, instrumentation grade WR-34 Band waveguide spacer (shim) with WR-34 window and UG-1530/U square flange. The spacer is manufactured with a precision machining process to ensure high quality and ruggedness. The spacer is offered to cover the frequency range of 22 to 33 GHz.

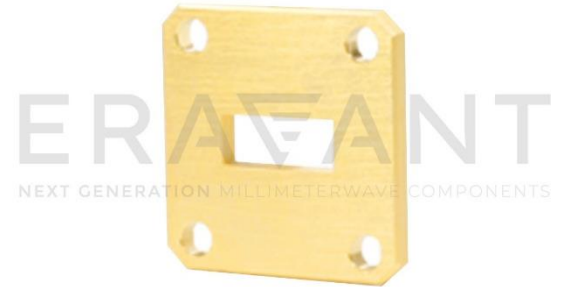

Mechanical Specifications:

Item	Specification
Waveguide Size	WR-34 Waveguide with UG-1530/U Flange
Material	Brass
Finish	Gold Plated
Weight	0.7 Oz
Insertion Length	0.208"(L)
Outline	WI-3L

ECCN

EAR99

FEATURES

- Frequency Range: 22 to 33 GHz
- 3/8 Wavelength
- Low Insertion Loss
- Instrumentation Grade

APPLICATIONS


- Module Tuning
- Sub-assemblies
- Mechanical Fitting
- VNA Calibration

SUPPLEMENTAL DETAILS



SWI-34208-SB

Mechanical Outline: Unless otherwise specified, all dimensions are in inches [millimeters]

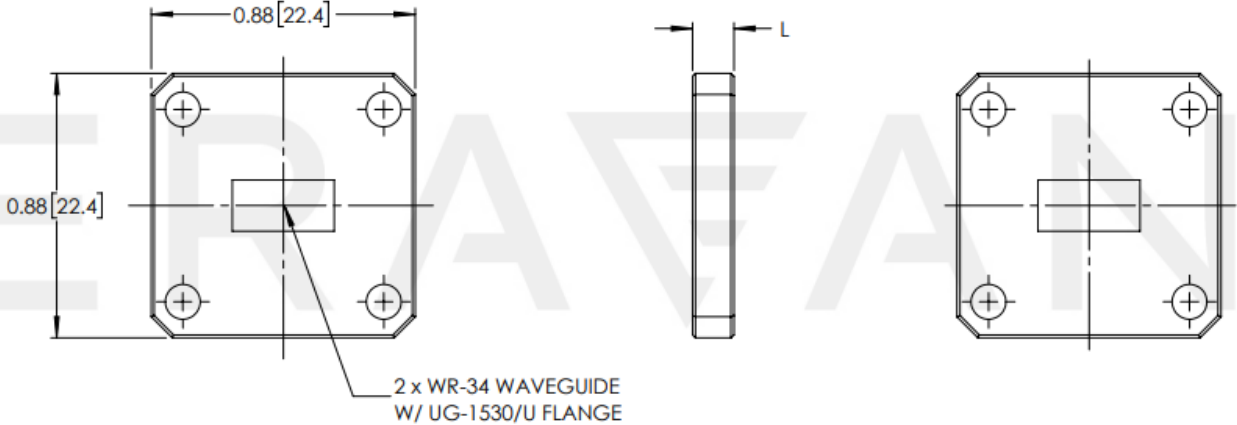

NOTE:

- Length "L" is customizable.
- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.