

## WR-22 Waveguide Open, Fixed

### Description:

**Model SWO-22-F1-WP** is a fixed waveguide open with a UG-383/U flange covering the frequency range from 33 to 50 GHz. The product consists of a waveguide short (model number **SWS-QU-F1**) and a  $\frac{1}{4} \lambda$ g waveguide shim (model number **SWI-22092-SB**). The waveguide shim is 0.092" thick offering perfect open at the center frequency of 41.5 GHz when combined with the waveguide short. The product is manufactured with a precision machining process to ensure high quality and ruggedness. The open offers good reflection in the entire frequency range.



### Features:

- Frequency Range: 33 to 50 GHz
- Good Reflectivity
- Instrumentation Grade

### Applications:

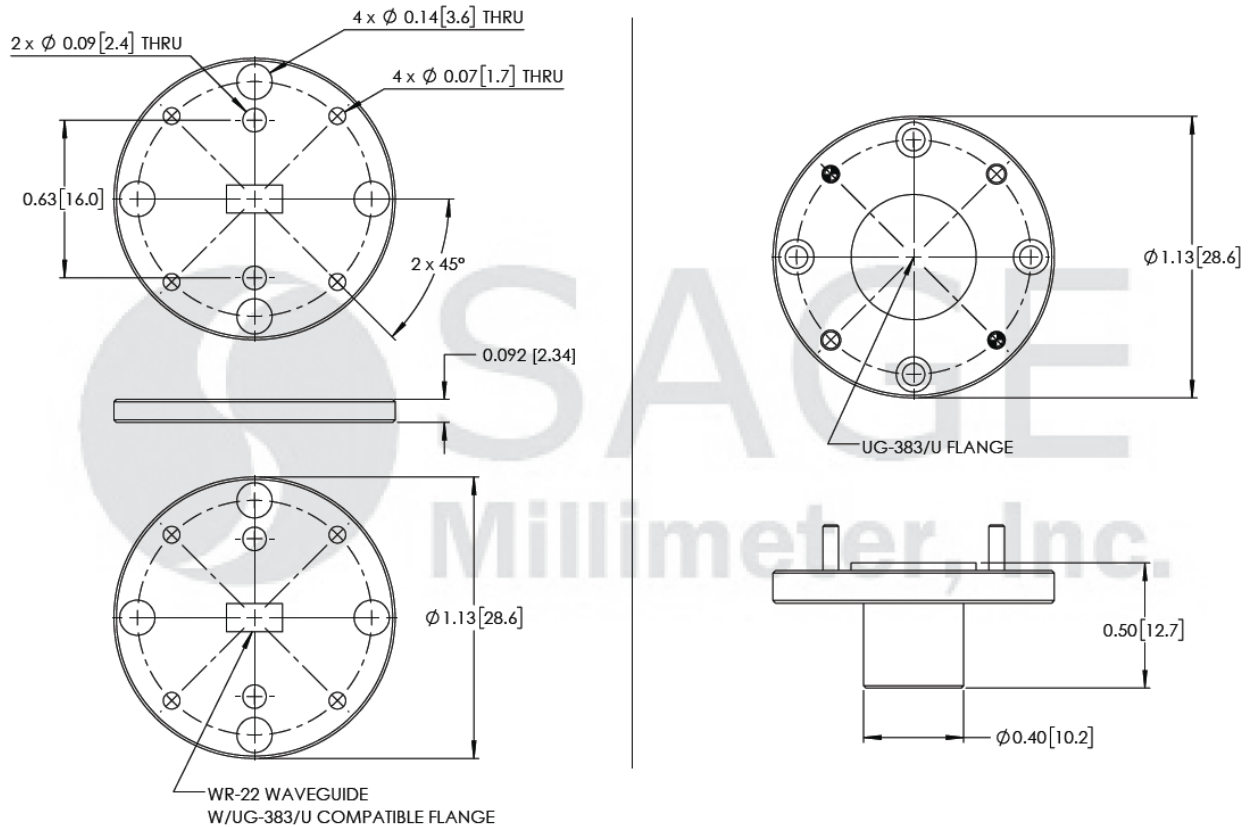
- Test Labs
- Test Instrumentation
- System Calibration

### Mechanical Specifications:

Item	Specifications
Waveguide	UG-383/U Flange
Waveguide Flange Material	Brass
Finish	Gold Plated
<b>SWI-22092-SB</b> Length	0.092" (L)
Weight	0.8 Oz ( <b>SWS-QU-F1</b> ) + 0.5 Oz ( <b>SWI-22092-SB</b> )
Outline	WO-QF

## WR-22 Waveguide Open, Fixed

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

**Note:**

- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.